


**Furnish& Installation of 13,000 square feet of Six (6) Inch Thick Reinforced Concrete Sidewalk**

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary to furnish and install 13,000 S.F of reinforced concrete sidewalk at North Lake Community Park. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

**Misc. Items to be noted:**

- Field verification by Contractor is recommended
- 13,000 S.F. @ 6 INCH Thick, Fiber reinforced, 3000 PSI concrete sidewalk.
- Completion of all concrete work not to exceed four (4) days from the issuance of the purchase order.
- Remove any excess lime rock and place on the existing lime rock road, grade, compact and roll.
- **North Lake Community Park- 40730 Roger Giles Rd. Umatilla, FL 32784**
- **See attached map & details**

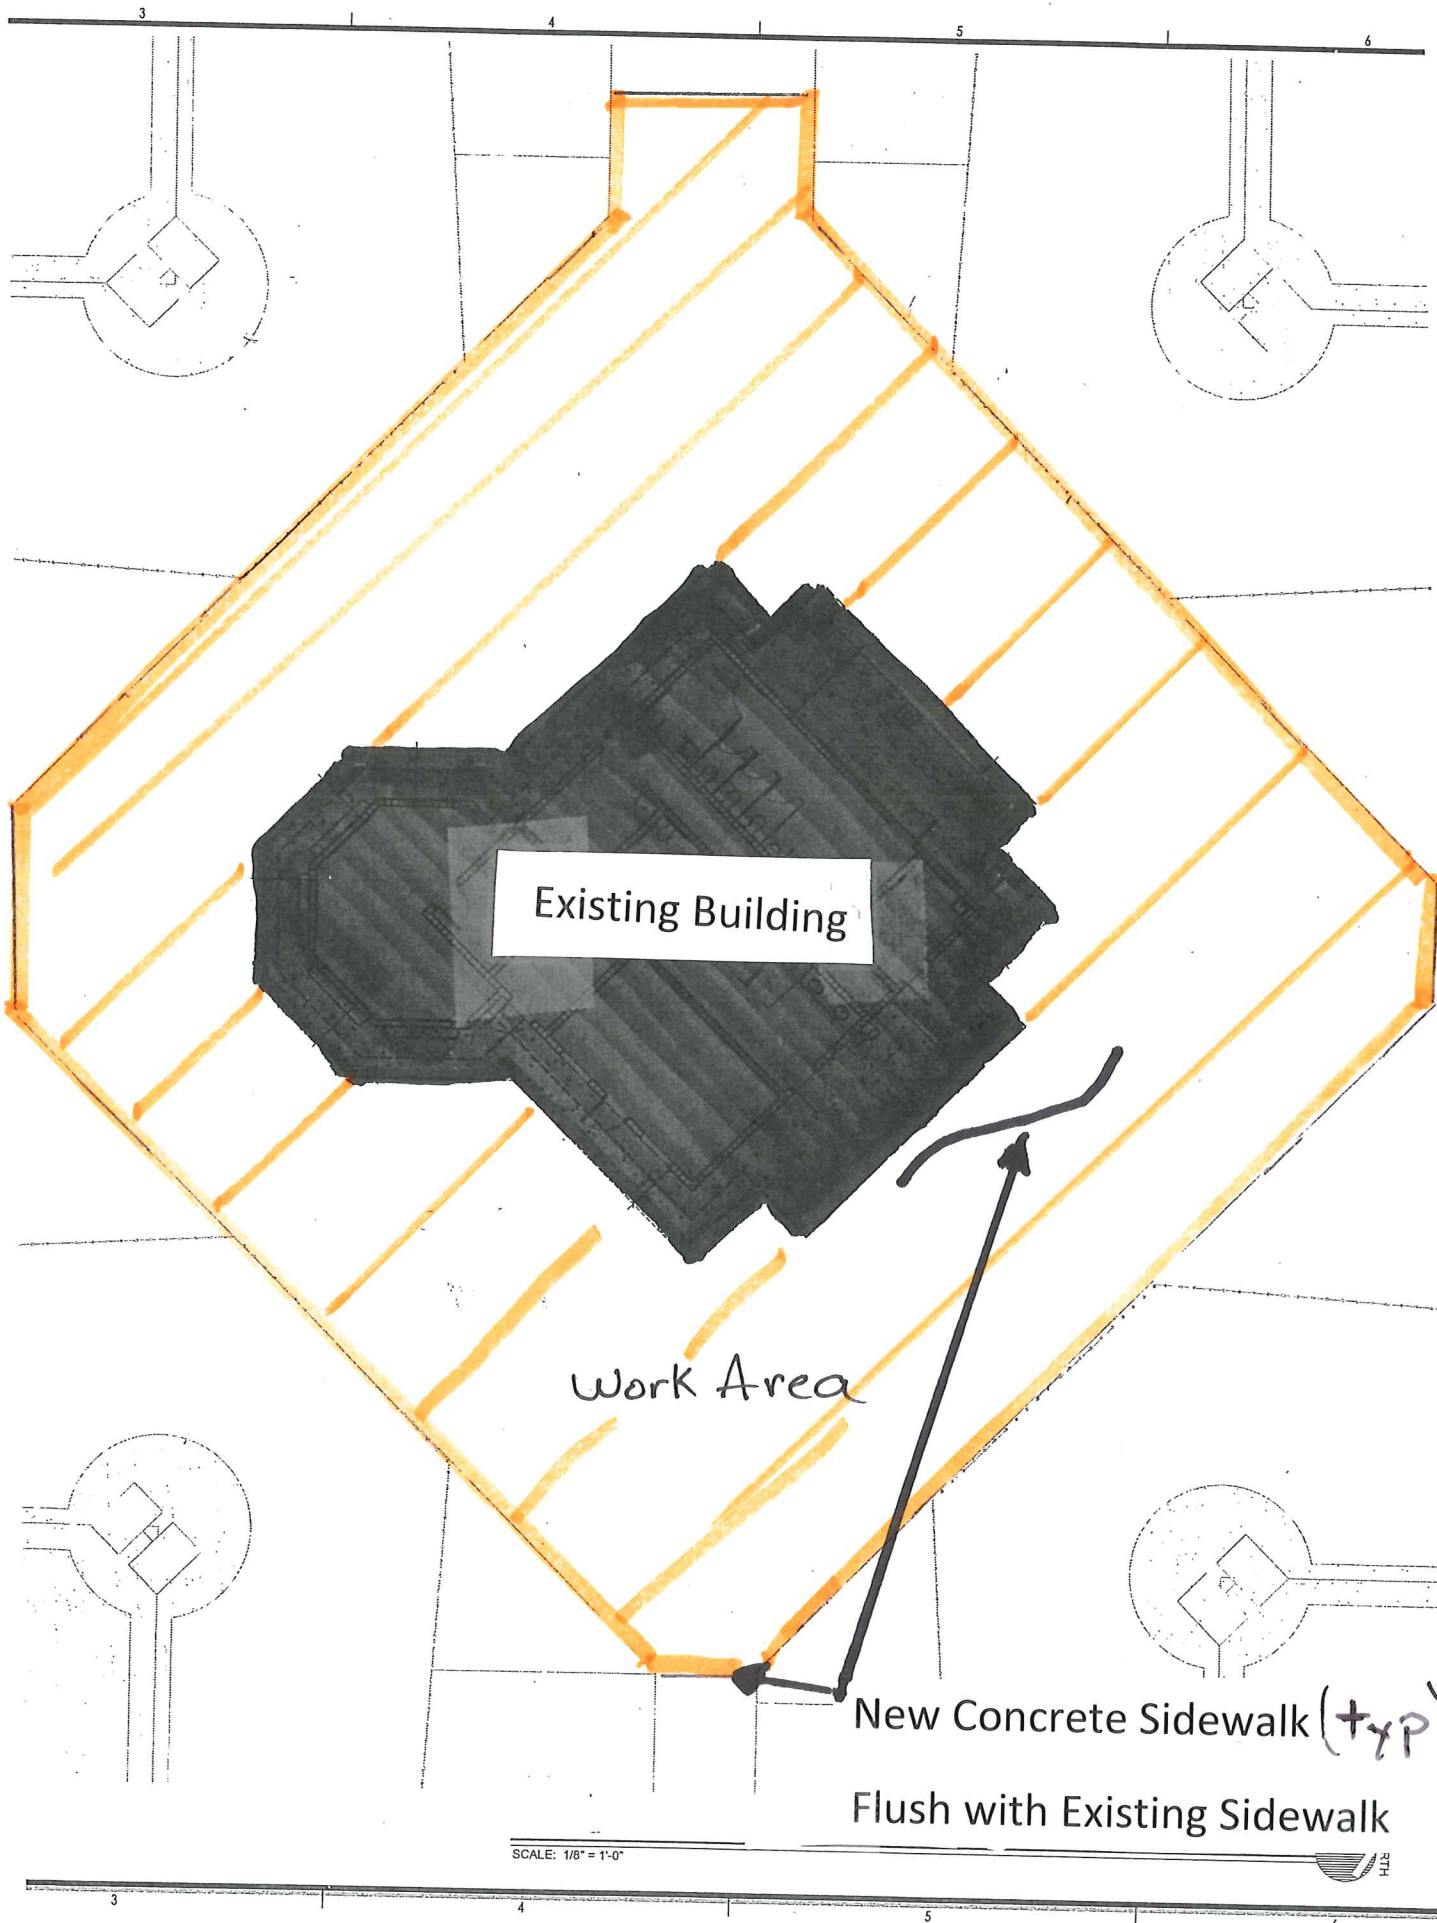

Existing Building

Work Area

New Concrete Sidewalk (typ)

Flush with Existing Sidewalk

SCALE: 1/8" = 1'-0"

RTH



# North Lake Community Park






## SITE DIRECTORY

- |                  |                 |                  |                         |
|------------------|-----------------|------------------|-------------------------|
| <b>P</b> Parking | Shelter         | Exercise Station | Dog Park                |
| Restroom         | Pavilion        | Playground       | Path Lighting (Typical) |
| Concession       | Multi-Use Trail | Hiking Trail     |                         |



# SIDEWALK DETAIL (TYP)

6" THICK CONC. SIDEWALK  
(3000 PSI) w/ fiber

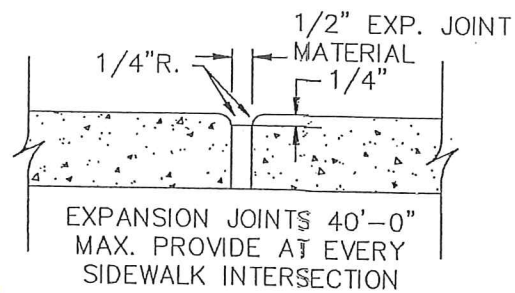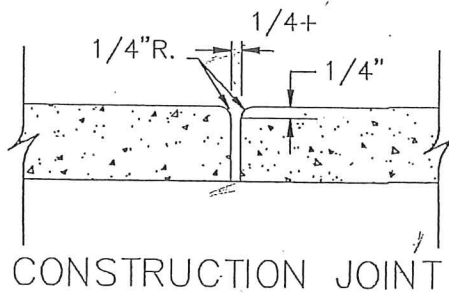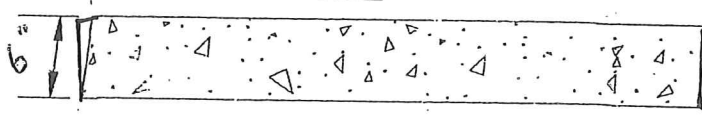

ALL EXPANSION JOINTS TO BE CAULK

## CONTROL JOINT / EXPANSION JOINT CHART:

WIDTH OF SIDEWALK	CONTROL JOINT	EXPANSION JOINT
4'	EVERY 4'	EVERY 24'
5'	EVERY 5'	EVERY 25'
6'	EVERY 6'	EVERY 24'
8'	EVERY 8'	EVERY 24'
10'	EVERY 10'	EVERY 30'

## CONCRETE SIDEWALK DETAIL

N.T.S.