

ADDENDUM #1
CR-439/SR-44 Intersection,
CR-44/Hicks Ditch Road Intersection
and
#5562 Orange Avenue/# 5876 Estes Road Intersection
Project No. 2008-03
Bid No. 08-0008

This addendum is being issued to make the following changes, corrections, clarifications and additions to the bidding document. The information in this addendum modifies and changes the original bidding documents and takes precedence over the original documents. **Receipt of this addendum shall be acknowledged by the bidder by signing and dating the appropriate line on page W-4 of the bid proposal.** Failure to acknowledge this addendum may preclude consideration of the bid proposal for award.

A non-mandatory pre-bid meeting for the referenced project was held at 9:15 p.m. on January 23, 2008, in the Department of Public Works' conference room. The following were in attendance:

Name (Please Print)	Representing	Phone Number	Email Address
Albert Arjibay	Orlando Paving Co.	407-578-9779	albertarjibay@hubbard.com
Kathy Barnes	DAB Constructors, Inc.	352-447-5488	kathryn@dadcon.com
David Berger	Lake County Public Works	352-394-2559	dberger@lakecountyfl.gov
Danny Cordle	Professional Dirt Service, Inc.	352-589-7000	
Roxanne Chapman	J. Malever Construction, Inc	352-429-9507	roxychapmanjmc@embarqmail.com
James Christian	Barracuda Building Corp.	407-814-8644	
Dennis Dietz	Lake County Public Works	352-742-1766	ddietz@lakecountyfl.gov
Gary Gant	State Asphalt Corp.	352-241-7040	stateasphalt@embarqmail.com
Stephen Lathrop	Lake County Public Works	352-394-2559	slathrop@lakecountyfl.gov
Tim Lusher	Art Walker Construction, Inc.	352-629-1466	artwalkerconst@hughes.net
Phil Maggio	Lake County Public Works	352-483-9043	pmaggio@lakecountyfl.gov
Heath McArdle	Lake County Public Works	352-483-9027	hmcardle@lakecountyfl.gov
Sherry McDermott	Lake County Public Works	352-483-9020	smcdermott@lakecountyfl.gov

Steve McGrath	CTL	352-787-1268	ctlleesburg@aol.com
Tom Miller	Art Walker Construction, Inc	352-629-1466	artwalkerconst@hughes.net
Dan Morris	Southern Site Works	813-788-6087	
Jimmy Pascarella	Professional Dirt Service, Inc.	352-589-7000	jimmydp@earthlink.net
Alan Peckham	Southern Site Works	813-788-6087	apeckham@sswfl.com
Ron Rudolph	Lake County Public Works	352-483-9021	rrudolph@lakecountyfl.gov
Terry Scott	Lake County Public Works	352-483-9023	jscott@lakecountyfl.gov
Dan Stimowere	State Asphalt Corp.		
Chrisina Tabor	CFE, Corp	407-834-6115	ctabor75@aol.com
Dominic Zawilski	Lake County Public Works	352-483-9022	dzawilski@lakecountyfl.gov

This project consists of the construction of turn lanes in the following areas of North Lake County: #6068 CR-439 and SR-44 intersection, #7483 CR-44 and Hicks Ditch Road intersection and #5562 Orange Avenue and #5876 Estes Road intersection. Other work shall include stormwater structures and piping installation, swale work, sod, thermoplastic striping, and other miscellaneous incidental construction.

Additional Information for CR-439/SR-44 Intersection

1. Pay close attention to all general notes shown in the construction plans, particularly the note on resident notification.
2. All striping and placement of all roadway signs shall be coordinated 48 hours in advance with Dennis Warren, Road Operations Superintendent, at (352) 742-0478. The striping must achieve a reflectivity reading of 450 for the white and 350 for the yellow when using a 30 meter reflectometer. Any striping not meeting these specifications shall be the contractor's responsibility to remove and replace at their expense. The contractor shall self inspect all road markings using the May 27, 2005 Florida Method of Test for Traffic Striping Retroreflectivity Designation: FM 5-579 or the latest editions now in force or hereafter adopted, to test and certify width, thickness, color and retroreflectivity. The contractor shall submit the results to the County. The County reserves the right to verify all test results. The County's test shall be final and binding.
3. We do not have the FDOT permit at this time; however, we do have a verbal from FDOT approving the permit and will provide a copy. This project is exempt from St. John's River Water Management District permitting. NPDES permitting still applies.

4. All work shall be completed in its entirety by the contract time, including all punch list items.

Additional Information for CR-44/Hicks Ditch Road Intersection

1. Pay close attention to all general notes shown in the construction plans, particularly the note on resident notification.
2. All striping and placement of all roadway signs shall be coordinated 48 hours in advance with Dennis Warren, Road Operations Superintendent, at (352) 742-0478. The striping must achieve a reflectivity reading of 450 for the white and 350 for the yellow when using a 30 meter reflectometer. Any striping not meeting these specifications shall be the contractor's responsibility to remove and replace at their expense. The contractor shall self inspect all road markings using the May 27, 2005 Florida Method of Test for Traffic Striping Retroreflectivity Designation: FM 5-579 or the latest editions now in force or hereafter adopted, to test and certify width, thickness, color and retroreflectivity. The contractor shall submit the results to the County. The County reserves the right to verify all test results. The County's test shall be final and binding.
3. All work shall be completed in its entirety by the contract time, including all punch list items.

Additional Information for #5562 Orange Avenue/# 5876 Estes Road Intersection

1. Pay close attention to all general notes shown in the construction plans, particularly the note on resident notification.
2. All striping and placement of all roadway signs shall be coordinated 48 hours in advance with Dennis Warren, Road Operations Superintendent, at (352) 742-0478. The striping must achieve a reflectivity reading of 450 for the white and 350 for the yellow when using a 30 meter reflectometer. Any striping not meeting these specifications shall be the contractor's responsibility to remove and replace at their expense. The contractor shall self inspect all road markings using the May 27, 2005 Florida Method of Test for Traffic Striping Retroreflectivity Designation: FM 5-579 or the latest editions now in force or hereafter adopted, to test and certify width, thickness, color and retroreflectivity. The contractor shall submit the results to the County. The County reserves the right to verify all test results. The County's test shall be final and binding.

3. On Orange Avenue, bid to saw cut and remove the existing paved shoulder. Reconstruct the paved shoulder full depth based on the Orange Avenue typical section.
4. All work shall be completed in its entirety by the contract time, including all punch list items.

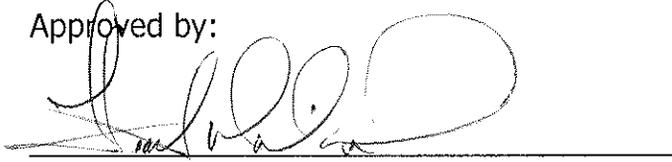
Question and Answers

- Q. On the CR439 project, there is a small amount of FC-6 required. Is the use of FC-6 an option on all 3 intersections involved?
- A. No, not at this time. The project is to be bid as shown on the construction plans.
- Q. What type of asphalt is to be used?
- A. Virgin asphalt.
- Q. What is the criteria for public notification?
- A. See the General Notes section of the construction plans for details.
- Q. Does the county keep a list of the property owners?
- A. This information can be obtained on the GIS section of the County's website (www.lakecountyfl.gov).
- Q. Is there a number of days you want this project completed in?
- A. The contractor is to provide the number of days to complete the project. The bid amount and the number of days to complete the project shall be considered when awarding the project.
- Q. When do VMS/Variable Message boards need to be displayed?
- A. For this project, VMS's are required 7 days prior to the start of construction, then they may be removed.
- Q. Has an environmental study been done?
- A. There is no environmental impact while working within the right of way.
- Q. Is the Orange Ave/Estes Road intersection used as a route for the school buses, and if so, should construction be adjusted for school hours?
- A. The County will notify the School Board of the construction, and school buses, as well as all traffic, must be maintained at all times during construction.
- Q. Do you have an estimated time for awarding the project?
- A. The bid opening is scheduled for February 14, 2008, and the estimated award date is approximately 30 to 45 days thereafter. Notice of proceed is anticipated to be issued by the middle of April.

Q. What about utilities that conflict with construction?

A. Utilities are required to relocate as soon as possible and as necessary so as to not impede construction. Contractor shall be responsible for coordinating utility relocation.

Approved by:

A handwritten signature in black ink, appearing to read 'Heath McArdle', is written over a horizontal line.

Heath McArdle, Senior Construction Inspector

:smcd