

**ADDENDUM #1  
DEWEY ROBBINS ROAD INTERSECTION WITH US-27  
PROJECT NO. 2008-05  
BID NO. 08-0018**

This addendum is being issued to make the following changes, corrections, clarifications and additions to the bidding document. The information in this addendum modifies and changes the original bidding documents and takes precedence over the original documents. **Receipt of this addendum shall be acknowledged by the bidder by signing and dating the appropriate line on page W-3 of the bid proposal.** Failure to acknowledge this addendum may preclude consideration of the bid proposal for award.

A non-mandatory pre-bid meeting for the referenced project was held at 11:00 p.m. on May 1, 2008, in the Department of Public Works' conference room. The following were in attendance:

<b>Name</b>	<b>Representing</b>	<b>Phone Number</b>	<b>Email Address</b>
Albert Arjibay	Orlando Paving	407-578-9779	<a href="mailto:Albert.arjibay@hubbard.com">Albert.arjibay@hubbard.com</a>
Kathy Barnes	DAB Constructors, Inc.	352-447-5488	<a href="mailto:kathrynb@dabcon.com">kathrynb@dabcon.com</a>
Ian Lund	Killebrew Inc.	863-701-0273	<a href="mailto:ian@killebrewinc.net">ian@killebrewinc.net</a>
Jeff MacLean	Marion Rock, Inc.	352-687-2023	<a href="mailto:jmaclean@marionrock.com">jmaclean@marionrock.com</a>
Phil Maggio	Lake County Public Works	352-483-9043	<a href="mailto:pmaggio@lakecountyfl.gov">pmaggio@lakecountyfl.gov</a>
Anthony Mamone	Atlantic Construction Co.	407-260-0905	<a href="mailto:amamone@atlanticconst.com">amamone@atlanticconst.com</a>
Sherry McDermott	Lake County Public Works	352-483-9020	<a href="mailto:smcdermott@lakecountyfl.gov">smcdermott@lakecountyfl.gov</a>
Tom Miller	Art Walker Construction, Inc.	352-629-1466	<a href="mailto:artwalkerconst@hughes.net">artwalkerconst@hughes.net</a>
Corey Phillips	Allstate Paving, Inc.	407-277-5247	
Tony Quarttrocki	Lake County Public Works	352-4839042	<a href="mailto:aquarttrocki@lakecountyfl.gov">aquarttrocki@lakecountyfl.gov</a>
Kenny Rose	Pospiech	352-726-3940	
Terry Scott	Lake County Public Works	352-483-9023	<a href="mailto:jscott@lakecountyfl.gov">jscott@lakecountyfl.gov</a>

This project is located on US-27, south of Leesburg. The construction shall consist of building both northbound and southbound turn lanes on US-27 at the intersection of Dewey Robbins Road. The turn lanes shall be constructed using 12" Type B stabilized subbase (40 LBR, 98% compaction), 10" limerock (2-Lifts, 98% compaction), prime and sanded, 3.5" level "C" superpave, and ¾" FC-5 asphaltic concrete with ground tire rubber. Other work shall include the construction of swales, removal of asphalt and base material, relocation of storm inlet, roadway signs, sodding, thermoplastic striping, and other miscellaneous incidental construction.

**Additional Information**

- All striping and placement of all roadway signs shall be coordinated 48 hours in advance with Dennis Warren, Road Operations Superintendent, at (352) 742-0478. The striping must achieve a reflectivity reading of 450 for the white and 350 for the yellow when using a 30 meter reflectometer. Any striping not meeting these specifications shall be the contractor's responsibility to remove and replace at their expense. The contractor shall self inspect all road markings using the May 27, 2005 Florida Method of Test for Traffic Striping Retroreflectivity Designation: FM 5-579 or the latest editions now in force or hereafter adopted, to test and certify width, thickness, color and retroreflectivity. The contractor shall submit the results to the County. The County reserves the right to verify all test results. The County's test shall be final and binding.
  
- Attached is revised sheet 7 of the construction plans that shows a revision in a vertical curve. Use this information for the vertical curve; All other information provided on sheet 7 of the construction plans remains the same.
  
- Bid to furnish and install a yield sign and post not shown on the construction plans. The sign location shall be provided at a later date.
  
- There is existing limerock on Dewey Robbins Road; the approximate existing centerline elevations are listed below.

Calculated Elevations of Existing Limerock	
STA	Existing Finished Limerock
9+86.71	89.09
10+36.10	88.52
10+86.10	88.26
11+36.10	88.27
11+86.10	88.3

- Contractor shall install portable changeable (variable) message signs on US-27 one week prior to construction in order to inform residents and roadway users of the impending construction. The PCMS shall display lane closure information including but not limited to anticipated lanes to be closed. Extent of lane closure (i.e. "next 3 miles"), daily hours of closure, and temporary speed restrictions.

**Question and Answers**

Q. Is there a number of days you want this project completed in?

A. The contractor is to provide the number of days to complete the project. The bid amount and the number of days to completion shall be considered when awarding the project.

Q. Will liquidated damages be assessed?

A. Yes, liquidated damages shall be assessed as stated in the bidding document.

Q. Will a DOT inspector be on the construction site?

A. Yes

Approved by:





\_\_\_\_\_  
Ron Rudolph, Senior Construction Inspector

:smcd

NOTES  
 1. EXISTING 30"x46" CONCRETE PIPE AND INLET AT STA. 11+27.00 DEWEY ROBBINS ROAD TO BE RETAINED

ALONG DEWEY ROBBINS ROAD, THE LINE LABELED EXISTING R/W HAS BEEN PROVIDED BY LAKE COUNTY AND THE LINE LABELED RIGHT OF WAY HAS BEEN TAKEN FROM THE SIGNED/SEALED SURVEY DRAWING DATED JUNE 7, 2007 BY GPI, INC. BOTH SURVEYS REFERENCE THE ROW FROM THE SAME SECTION LINE, HOWEVER, THAT SECTION LINE IS SHOWN IN DIFFERENT LOCATIONS ON EACH RESPECTIVE SURVEY. THE RIGHT OF WAY LINES ALONG US 27 HAVE ALSO BEEN TAKEN FROM THE SAME GPI SURVEY AS REFERENCED ABOVE.

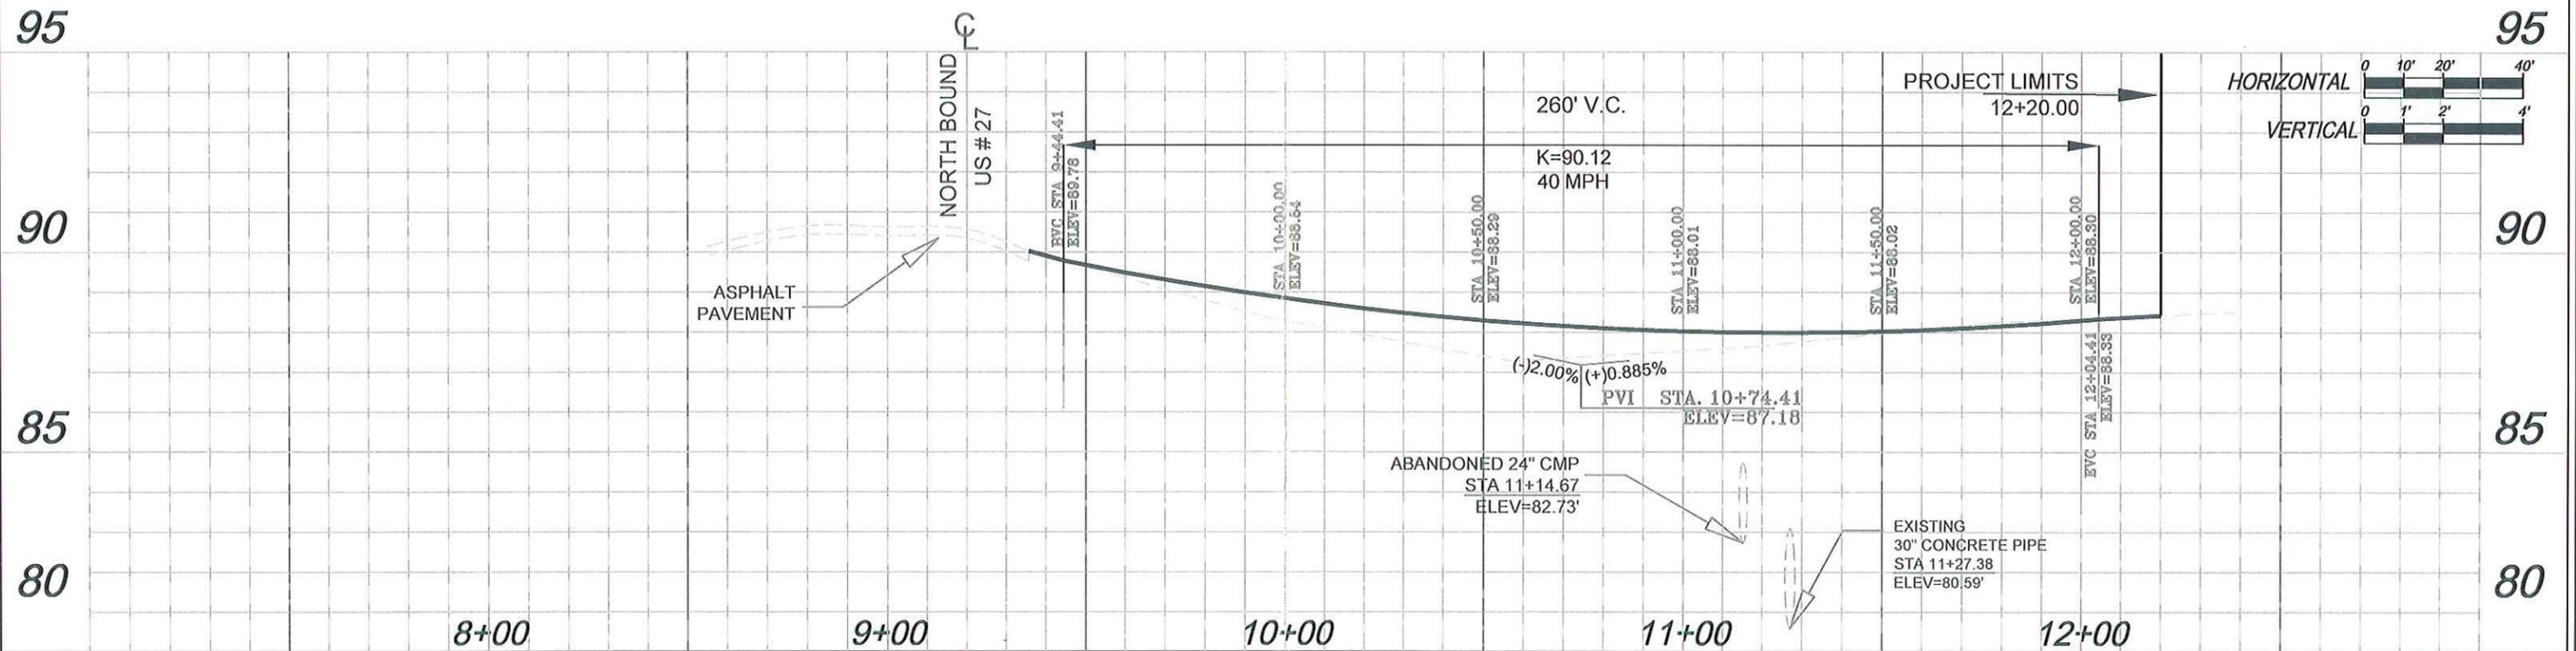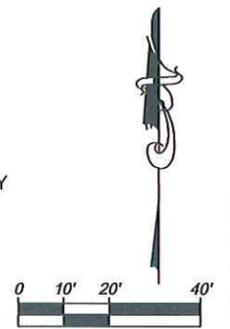

REVISIONS		
DATE	BY	DESCRIPTION

TINDALE-OLIVER AND ASSOCIATES, INC.  
 GEORGE L. FLANAGAN, P.E.  
 55923  
 P.E. NUMBER      DATE

TINDALE-OLIVER AND ASSOCIATES, INC.  
 1595 SOUTH SEMORAN BLVD., SUITE 1540  
 WINTER PARK, FLORIDA 32792  
 PH. 407-657-9210  
 FAX 407-657-9106

LAKE COUNTY PUBLIC WORKS DEPARTMENT		
COUNTY PROJECT NO.	COUNTY	TOA PROJECT NO.
	LAKE	166035-00.05

DEWEY ROBBINS ROAD  
 PLAN AND PROFILE  
 STA. 8+00.00 TO STA. 13.00

SHEET NO.  
 7