

SECURITY GRILLES

Model 670



Overhead Door Corporation's upward-coiling grilles provide an attractive yet functional means to secure areas where public access must be restricted. These ruggedly-constructed grilles provide security without sacrificing visual air circulation or light infiltration. Available in aluminum, galvanized steel, or stainless steel curtain -- and with an optional electric operator -- our rolling grilles are well-suited to most any environment and application.

Upward-Coiling Grilles - - Many Options, Versatile Applications

Aluminum, galvanized steel or stainless steel curtain meet a wide range of project and design requirements. Aluminum curtain with optional fire-retardant polycarbonate panel provides full visual access, and adds protection against theft. Choice of straight-lattice or staggered brick pattern for added interest. Optional electric operator allows grille automation for 24-hour parking garages and institutional/industrial applications. Special high-usage package promotes long-life and low-maintenance in heavy-use applications.

DOOR OPTIONS

Electric operator, chain hoist, removable awning crank or crank box
 Electric operator with automatic emergency egress
 Emergency egress operation with manual release
 Aluminum curtain with polycarbonate filler panels
 24-gauge galvanized steel hood
 Heavy-usage package

Anodized finishes: clear, bronze (aluminum)
 No. 4 finish (stainless)
 Powdercoat paint finish in 197 standard colors or color matched to your specification
 Controls: time clock, card reader, keypad access
 Cylinder lock

FEATURES

Operation
Manual

Curtain material
Standard: aluminum
Optional: fire-retardant polycarbonate panels

Curtain pattern
Standard: straight lattice: 5/16" (8 mm) rods at 2" (51 mm) on center and links at 9" (229 mm) on center
Optional: staggered brick: 5/16" (8 mm) rods at 2" (51 mm), on center and links at 4 1/2" (114 mm) on center
Optional: curtain with polycarbonate 5/16 (8 mm) rods at 3" (76 mm) on center and links at 12" (305 mm) on center

Guide type
Aluminum extruded track

Mounting
Face mount with wall angle Or between jambs on 3"x3" (76x76 mm) Or 4"x4" (102x102 mm) structural steel tubes

Finish
Standard: mill finish on aluminum; 2B on stainless; galvanized on steel

Locking
Slide bolt for manual and chain operation
Chain lock for chain hoist operation


Warranty
12 month limited

SUPPORT DOCUMENTS



[Brochure](#)

SECURITY GRILLE SYSTEMS

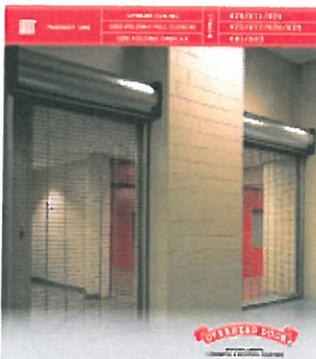

[System Brochure](#)



[PowderGuard™ Warranty](#)

Share This Web Page:



1-800-929-3667 (DOOR)

[About Us](#) | [Contact Us](#) | [Careers](#) | [Legal](#) | [Privacy Policy](#) | [Supply Chain Ethics Policy](#) | [Site Map](#)

Copyright© 2015 Overhead Door Corporation. All rights reserved.