

Pre-Bid – Addendum #1
 CR-44 Intersection with CR-44 Leg A,
 Project No. 2011-07
 Bid No. 12-0008

This addendum is being issued to make the following changes, corrections, clarifications and additions to the bidding document. The information in this addendum modifies and changes the original bidding documents and takes precedence over the original documents. **Receipt of this addendum shall be acknowledged by the bidder by signing and dating the appropriate line on page W-4 of the bid proposal.** Failure to acknowledge this addendum may preclude consideration of the bid proposal for award.

A non-mandatory pre-bid meeting for the referenced project was held at 9:00 a.m. on September 22, 2011 in the Department of Public Works' conference room. The following were in attendance:

Name	Company	Phone Number	Email Address
Lito Detorres	Professional Dirt Service	(352)589-7000	lito713@comcast.net
Jennings Griffin	SSMC	(352)343-4880	jgriffin@ssmc.us
Laurie Henderson	J. Malever Construction	(352)429-9507	tomsmithjmc@embarqmail.com
Blair Johnson	Ranger Construction	(407)656-9255	estimating.orlando@rangerconstruction.com
Jeff Johnson	Lake County Public Works	(352)483-9024	jjohnson@lakecountyfl.gov
Tim Lusher	Art Walker Construction	(352)6291466	office@artwalkerconstruction.com
Pat Magno	Lake County Public Works	(352)483-9053	pmagno@lakecountyfl.gov
Sherry McDermott	Lake County Public Works	(352)483-9020	smcdermott@lakecountyfl.gov
Ron Rudolph	Lake County Public Works	(352)483-9021	rrudolph@lakecountyfl.gov
Terry Scott	Lake County Public Works	(352)483-9023	jscott@lakecountyfl.gov
Dennis Warren	Lake County Public Works	(352)343-6439	dwarren@lakecountyfl.gov

This project is located in the Leesburg area along CR-44 and shall consist of constructing turn lanes and 3' paved shoulders on CR-44 at its intersection with CR-44 Leg A. Also included as part of this project is the realignment of Shady Acres Road to improve its connection to CR-44 and the milling and resurfacing of an additional 3,325' +/- of roadway on CR-44. The CR-44 intersection construction shall consist of milling the existing roadway 2" in depth, 12" compacted subgrade (98% compaction), 10" limerock placed in two (2) 5" lifts (98% compaction each lift), primed and sanded, 2 1/2" minimum of SP-12.5 asphaltic concrete, and 1" minimum SP-9.5 asphaltic concrete. New construction for Shady Acres Road shall consist of 12" type B stabilized subbase (40 LBR, 98% compaction), 8" limerock placed in two (2) 4" lifts (98% compaction each lift), primed and sanded, 2" minimum SP-9.5 placed in two (2) lifts. Other work associated with this project shall include the following: asphalt milling, thermoplastic striping, storm structure installation, swale work, driveway construction, roadway signage, sodding, and other miscellaneous incidental construction.


The following items were discussed:

1. Included as part of this project is the milling, resurfacing, shoulder grading, and restriping of approximately 3,325' +/- of CR-44. This work shall begin at Sta. 29+40.00 and continue West to the FDOT pavement joint associated with the US-441 project. This area will be marked in the field with pink paint and shall include the turn lanes located in front of the Lake Griffin Harbor Mobile Home Park. The contractor shall map and match all existing striping in the area of the additional milling and resurfacing. The typical section for this work is the last sheet of the construction plan set.

2. Asphalt millings are to remain the property of Lake County and are to be hauled by the contractor to the following location: Umatilla Maintenance Barn, 1927 East Fifth Ave., Umatilla, FL. A 48 hour notice must be given to Lake County prior to milling. The contractor shall not be allowed to stockpile the millings.
3. The contractor shall bid to relocate all fences to the right of way line using new material that will match the existing fence type.
4. Pay attention to all notes shown in the construction plans.
5. Work performed under this contract shall be based on a lump sum bid. Quantities, if shown in the bid, are estimated for bidding purposes only and shall be verified by the contractor.
6. The cost of all laboratory testing shall be borne by the county with the exception of the cost of failing tests and subsequent retests, which shall be borne by the contractor. Testing shall be in accordance with the FDOT Standard Specifications.
7. The contractor shall be responsible for notifying all utilities prior to construction and coordinating utility relocation with the project construction.
8. The contractor shall bid to remove all pavement, trees, and irrigation that are located within the old right of way that is to be vacated on Shady Acres Road.
9. There is an existing inlet located along Shady Acres Road at approximately Sta. 50+00 on the right side of the roadway. The contractor shall bid to remove the inlet grates and install a flat top with ring and cover on this inlet.
10. There are 2 existing wooden signs located in the right of way of Shady Acres Road. The contractor is to use special care when working around these signs.
11. On sheet 6 of the approved construction plans for the typical cross section of Shady Acres Road, change the 1" Type SP-9.5 and 1" Type SP-12.5, to 2" Type SP-9.5, placed in (2) 1" lifts.
12. Do not bid to install the stop sign, stop bar, and double yellow striping shown on sheet 20 of the construction plans at approximately Sta. 42+50.
13. Add a line item to your tabulation of quantities sheet for survey/layout.
14. The Engineers Estimate is \$586,000.00.

Any questions shall be submitted in writing by **October 3, 2011** to Sherry McDermott via email at smcdermott@lakecountyfl.gov and will be responded to through the issuance of an addendum. **Please be sure that all addendums are acknowledged by signing and dating the appropriate line on page W-4 of the bid proposal.** Addendums will be posted on Lake County's Procurement Services website. The website link for this project is provided below:
[http://www.lakecountyfl.gov/departments/county_manager/procurement_services/bid_details.aspx?bid number=12-0008](http://www.lakecountyfl.gov/departments/county_manager/procurement_services/bid_details.aspx?bid_number=12-0008)

Approved by:

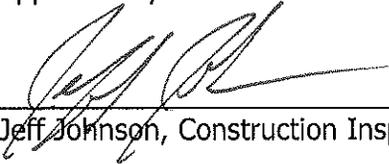

Jeff Johnson, Construction Inspection Manager



Date

:smcd