

Playground Equipment Replacement at North Lake Community Park

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary to furnish, deliver and install one (1) new X-Wave 2 (See P-1) and one (1) new Wiggle Walk (See P-2) at North Lake Community Park- 40730 Roger Giles Rd. Umatilla, FL. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Misc. Items to be noted:

- Field verification by contractor is recommended
- Concrete footers as recommended by manufacturer.
- Proper disposal of damaged products off County property.
- All work to be completed within 30 days of issuance of P.O.
- Approved equal is also acceptable upon approval of the Parks & Trails Division
- See attached map for location

1.02 SUBMITTALS:

- A. Submit product data/specification and shop drawings to Park and Trails Division for review and approval of all items of work.

1.03 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions. Custom fit playground products to match damaged / broken playground parts. (P- 1, P- 2)

1.04 PRODUCT HANDLING:

- A. Deliver products to site in manufacturer's containers or packaging.
- B. Store in secure and weather protected area.
- C. Return all damaged products to manufacturer.

PART III – EXECUTION

3.01 WORKMANSHIP:

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.

- C. All products shall be inspected by the County for damage and chipped or marred finish. Contractor shall replace any damaged or rejected products at no conditional cost to the owner. The owner's representative may at his option authorize acceptance of chipped or scratched painted surfaces repaired by contractor at his own risk.

3.02 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.



X-WAVE 2

X-Wave 2

42903

- Entire event moves with wave like motion, alternating on each pivot point!
- Absolutely NO pinch hinges, combined with soft, durable coating.
- A solid investment for the playground.
- Integrated hand holds for those that want additional stability.
- Works to develop balance, coordination and upper body strength.
- Exclusive patented Playmotion technology!

Minimum Use Zone

23'-3" x 20'-4" (7,09m x 2,20m)

Maximum fall height

42" (1,07 m)



P-1



B. Wiggle Walk

- Provides a circuit to functionally link play components.
- Available in Playmotion or stationary legs.

Minimum use zone


20" (0,51 m)

Maximum fall height

21" (0,53m)

P-2

North Lake Regional Park

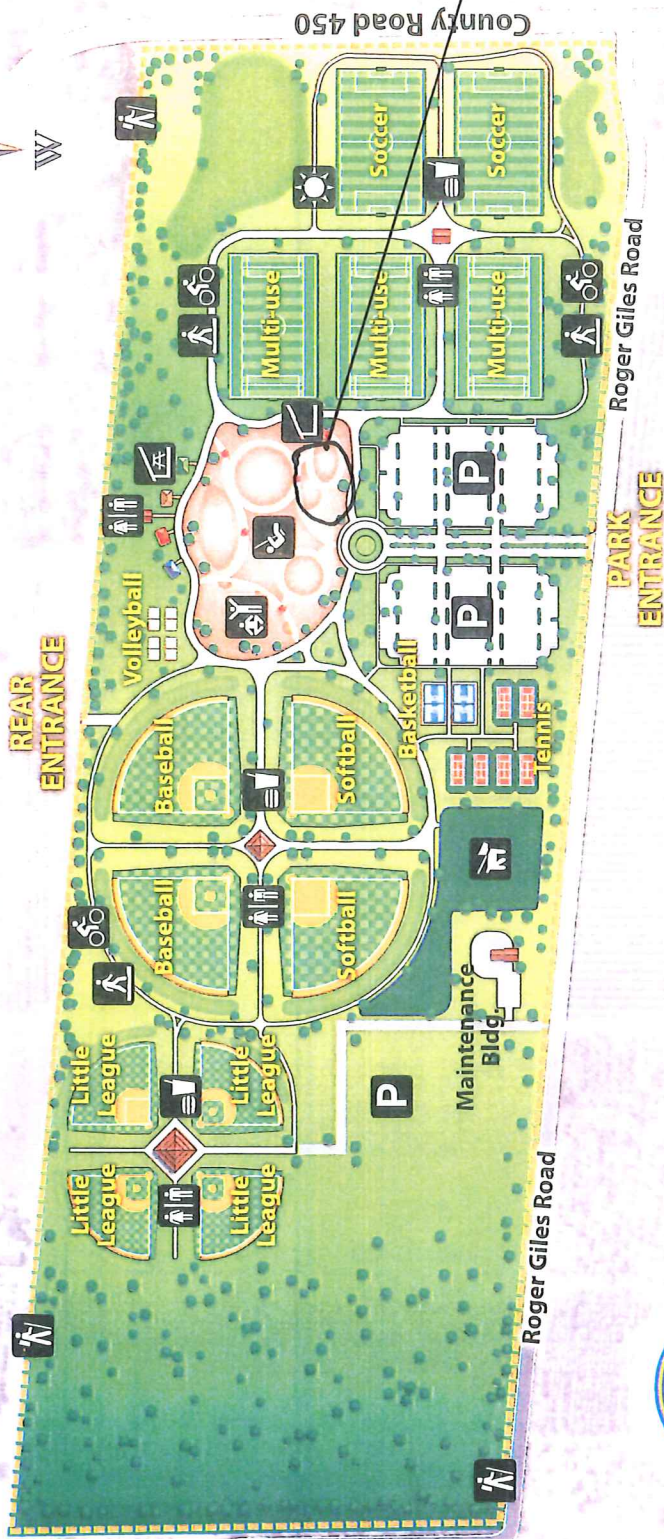

LAKE COUNTY
FLORIDA

SITE DIRECTORY

TOTAL ACRES: 115

- | | |
|------------------------|--------------------------------|
| P Parking | Dog Park |
| Restroom | Path Lighting (Typical) |
| Concession | |
| Shelter | Exercise Station |
| Pavilion | Playground |
| Multi-Use Trail | Hiking Trail |