

## **Minneola Athletic Complex- 1300 Fosgate Rd. Minneola, FL 34715**

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary for the installation of 110 lineal FT of 19 FT High Black vinyl 6 gauge schedule 40 chain link fencing at the Minneola Athletic Complex Field # 3. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

### **Misc. Items to be noted:**

- Field verification by Contractor is recommended.
- 19 FT High Black Vinyl fence- Softball Backstop @ 106 feet
- All fencing is to be installed as shown on attached plan.
- **Existing backstop to be removed by County. Not part of this RFQ**

### **Fence details for 19' High Fence**

19' High Black Vinyl Coated 6 gauge schedule 40 chain link fence is required. Steel Chart for schedule of sizes of members is as follows:  
Height of fence-19FT above ground (clay/grass area)  
Diameter of line posts-3 ½"  
Post spacing -5 FT Max  
Corner and end post- 4"diameter  
Top, Upper Middle, Lower Middle and Bottom Rail- 1 5/8" diameter  
Depth of post into footing (line post 3FT 2 "  
Depth of post into footing (end / corner / gate posts 4 FT 2" )  
Horizontal Braces at Corner and End post- 2 @ 1 5/8"  
Diagonal Braces – ½ "diameter  
Mesh to be placed on the outside of the fencing  
Tie wire # 6 W & M gauge aluminum ties @ 15 o.c. for rails. Ties to be 12" apart on posts. End of ties should be wound in a telegraph trust 2 ½ turns.

### **1.02 SUBMITTALS:**

- A. Submit product data/specification to Park and Trails Division for review and approval of all items of work.

### **1.03 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions.**

### **1.04 PRODUCT HANDLING:**

- A. Deliver products to site in manufacturer's containers or packaging.

- B. Store in secure and weather protected area.

### PART III – EXECUTION

#### 3.01 WORKMANSHIP:

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.
- C. All products shall be inspected by the County for damage and chipped or marred finish. Contractor shall replace any damaged or rejected products at no conditional cost to the owner. The owner's representative may at his option authorize acceptance of chipped or scratched painted surfaces repaired by contractor at his own risk.

#### 3.1 INSTALLATION

- A. Install furnishing in locations as indicated on the plans and details. Assure that all furnishings are installed plumb and level and in accordance with the plans and details.
- B. Install as per manufacturer's specifications



#### 3.2 ACCEPTANCE

- A. The County will review each installation to determine compliance prior to final acceptance of the work.

#### 3.4 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.

# FIVE FOOT PANELS

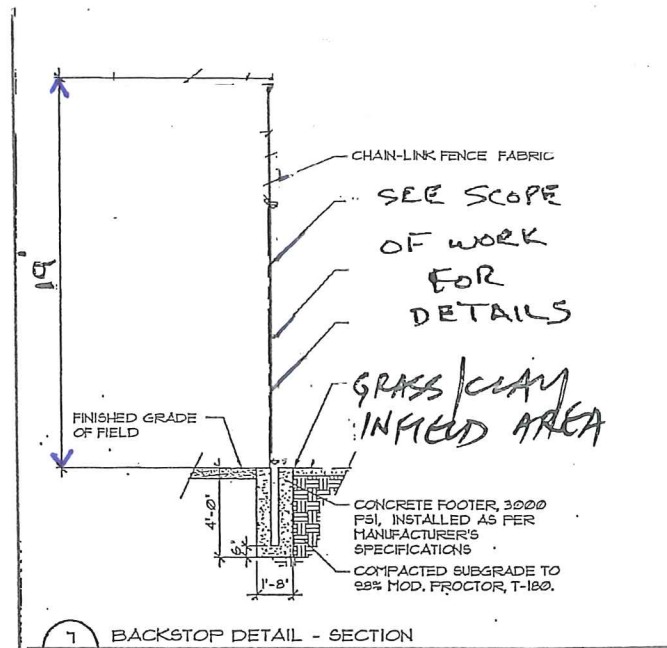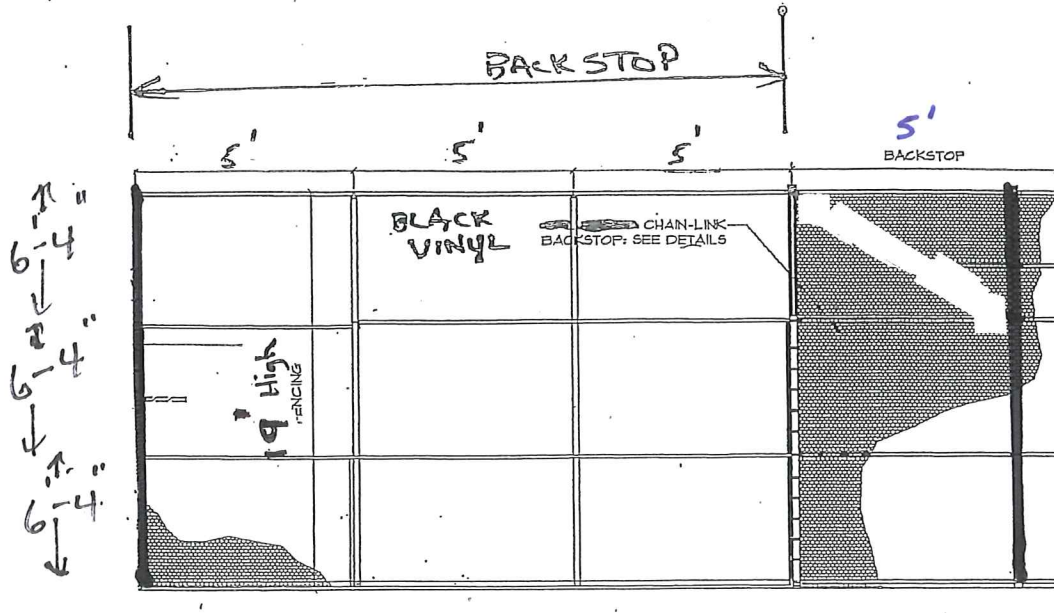


6 GAUGE SCHEDULE 40 CHAIN LINK  
FENCING (BLACK)

BACKSTOP (TYP.)

Not to  
scale

# FIELD # 3

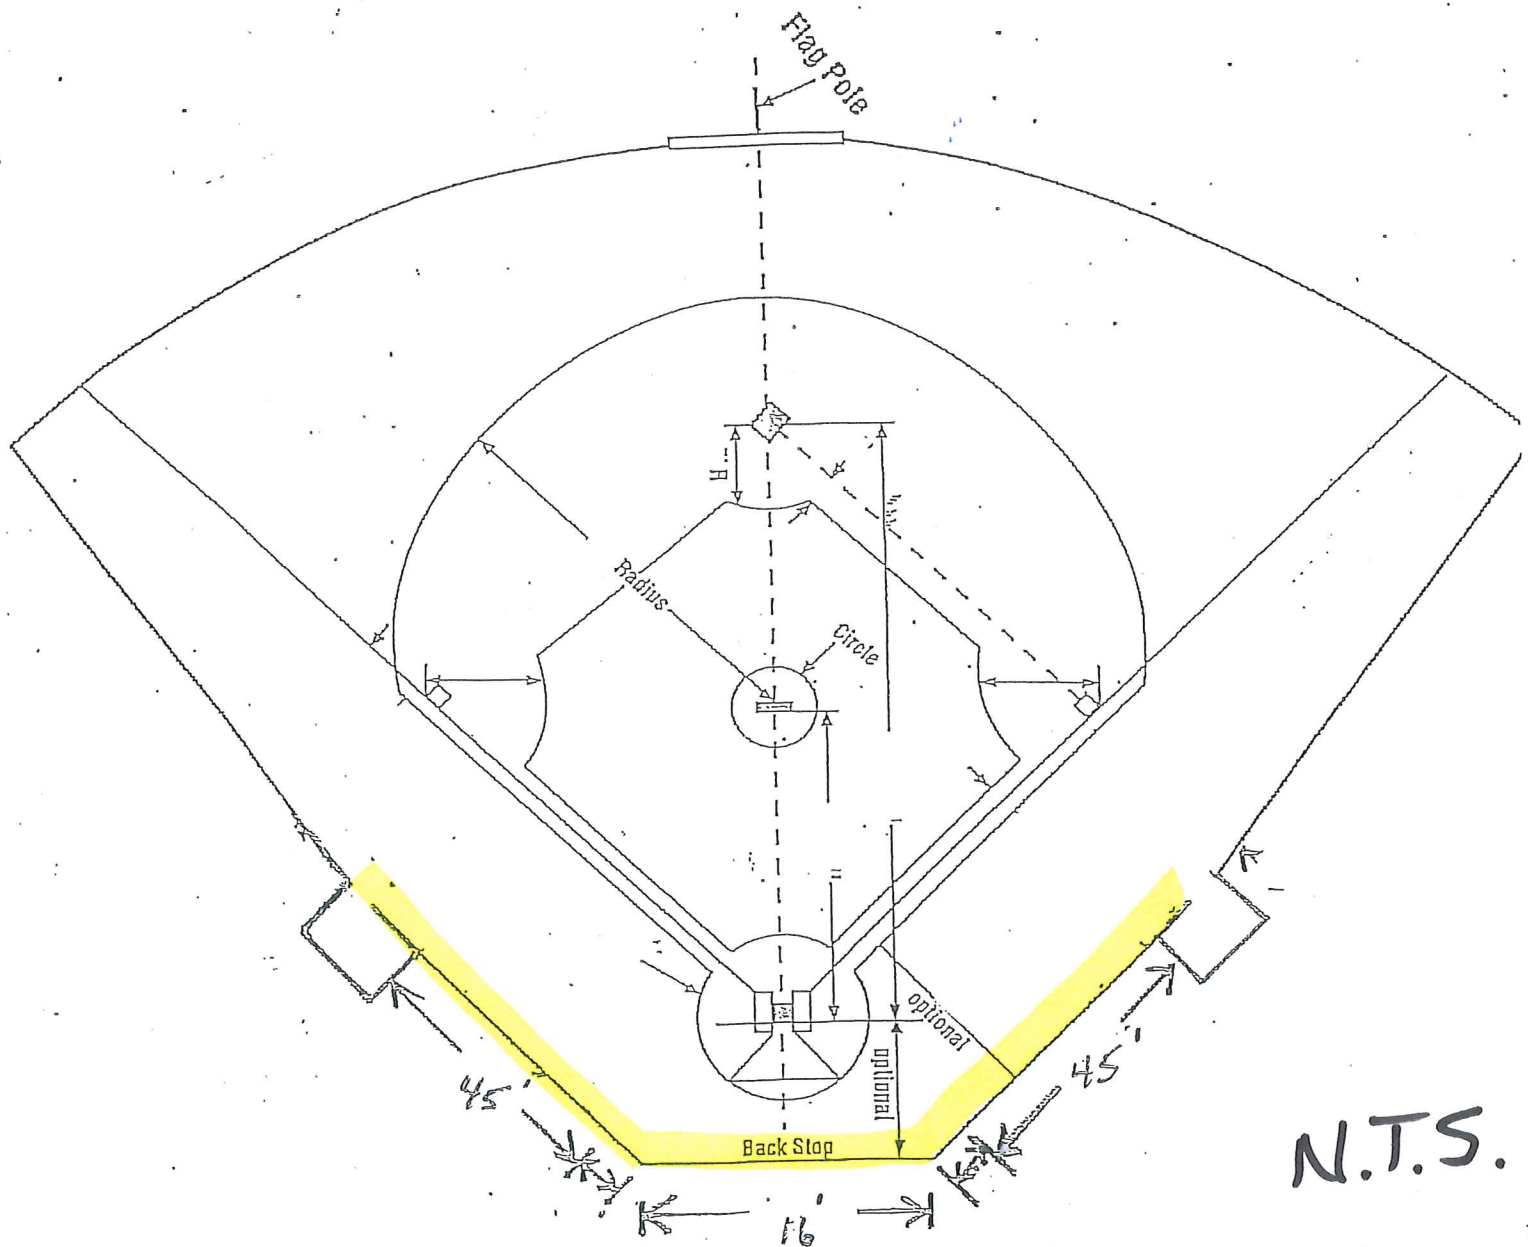

N.T.S.



EXISTING BACKSTOP TO BE REMOVED BY PARKS



NEW BACKSTOP TO BE INSTALLED 1 FT  
IN FRONT OF THE EXISTING BACKSTOP  
AT FIELD LEVEL






Reference only



# Minneola Athletic Complex

## SOUTH LAKE COMMUNITY PARK

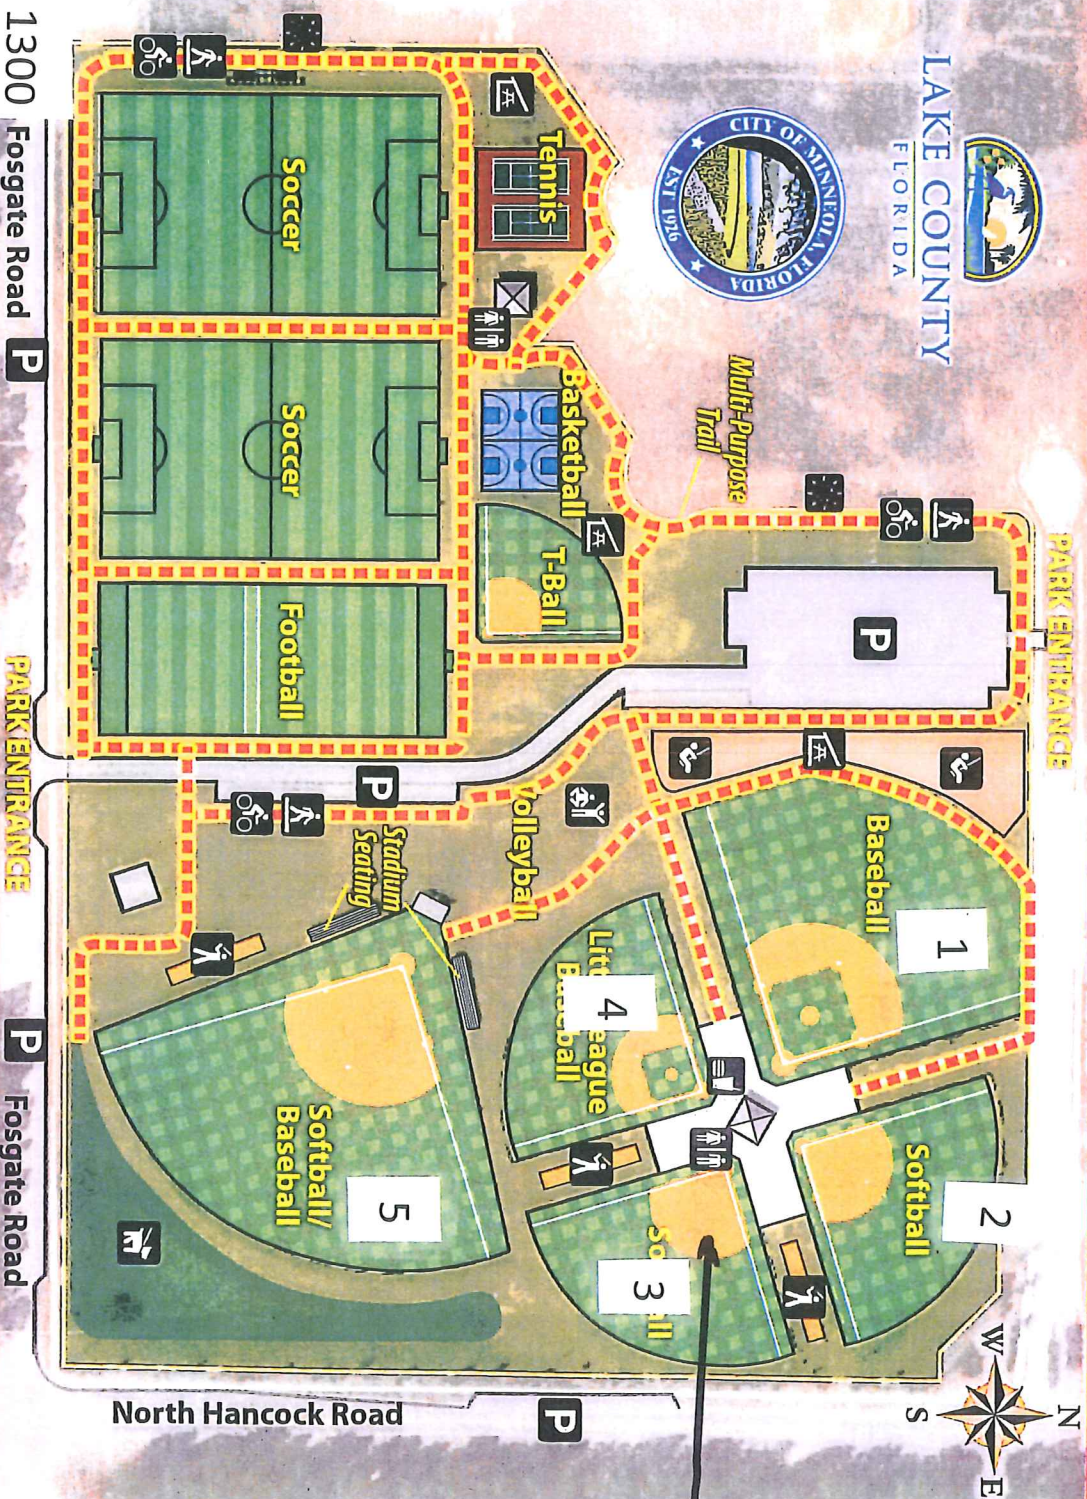

WORK  
AREA

### SITE DIRECTORY

- P** Parking
- Multi-Use Trail
- Restroom
- Exercise Station
- Pavilion
- Playground
- Concession
- Dog Park
- Path Lighting (Typical)
- Batting Cages