

Astor Lions Park – 54835 Alco Road, Astor FL 32102

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary for the installation, compaction, survey and laser grading of 1050 CY of top dressing material for the Big Field (Sheila Pike Field) at the Astor Lions Park repairs.

**Misc. Items to be noted:**

- Field verification by Contractor is recommended
- The minimum slope of outfield turf is 1% Maximum slope is 2%
- Drain away from home plate and towards warning rack
- Top dressing is 80/20 mix, 80% sand, 20% silt clay
- All applied Top Dressing should be graded to a fine grade
- Upon completion of the work, the awarded vendor is to police the site, remove all excess material / debris
- The contractor shall restore, at no additional charge to the County any damages caused to County property
- Submit 5 Pound Sample for approval to Parks and Trails 12929 County Landfill Road Tavares FL 32778

1.02 SUBMITTALS:

- A. Submit product data/specification and shop drawings to Park and Trails Division for review and approval of all items of work.
- B. All submittals to be approved by Parks and Trails Division prior to contractor delivering materials to site.

- 1.03 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions. Contractor is responsible for the installation of temporary construction fencing and signage to safely enclose the work area.

1.04 PRODUCT HANDLING:

- A. Deliver products to site in manufacturer's containers or packaging.
- B. Store in secure and weather protected area.

## PART II – PRODUCTS

- 2.01 MATERIALS: Provide products as called for on the drawing and specified herein. See furnishing schedule and descriptions on drawings for specific products and Manufacturer's specs.

## PART III – EXECUTION

### 3.01 WORKMANSHIP:

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.
- C. All products shall be inspected by the County for damage and chipped or marred finish. Contractor shall replace any damaged or rejected products at no additional cost to the owner. The owner's representative may at his option authorize acceptance of product

### 3.1 INSTALLATION

- A. Install furnishing in locations as indicated on the plans and details. Assure that all furnishings are installed plumb and level and in accordance with the plans and details.
- B. Install as per manufacturer's specifications

### 3.2 ACCEPTANCE


- A. The County will review each installation to determine compliance with plans and specifications prior to final acceptance of the work.
- B. Any work not installed in accordance with the plans and specifications and rejected by the County shall be removed and replaced at the Contractor's expense.

### 3.3 GUARANTEES

- A. The contractor shall furnish warranties in writing certifying that the quality and workmanship of all materials and installation furnished is in accordance with these specifications and in accordance with the original manufacturers' warranties. The contractor shall warrant the installation workmanship for a period of one year from the date of final acceptance of the job, or any accepted portion of the job.

### 3.4 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.

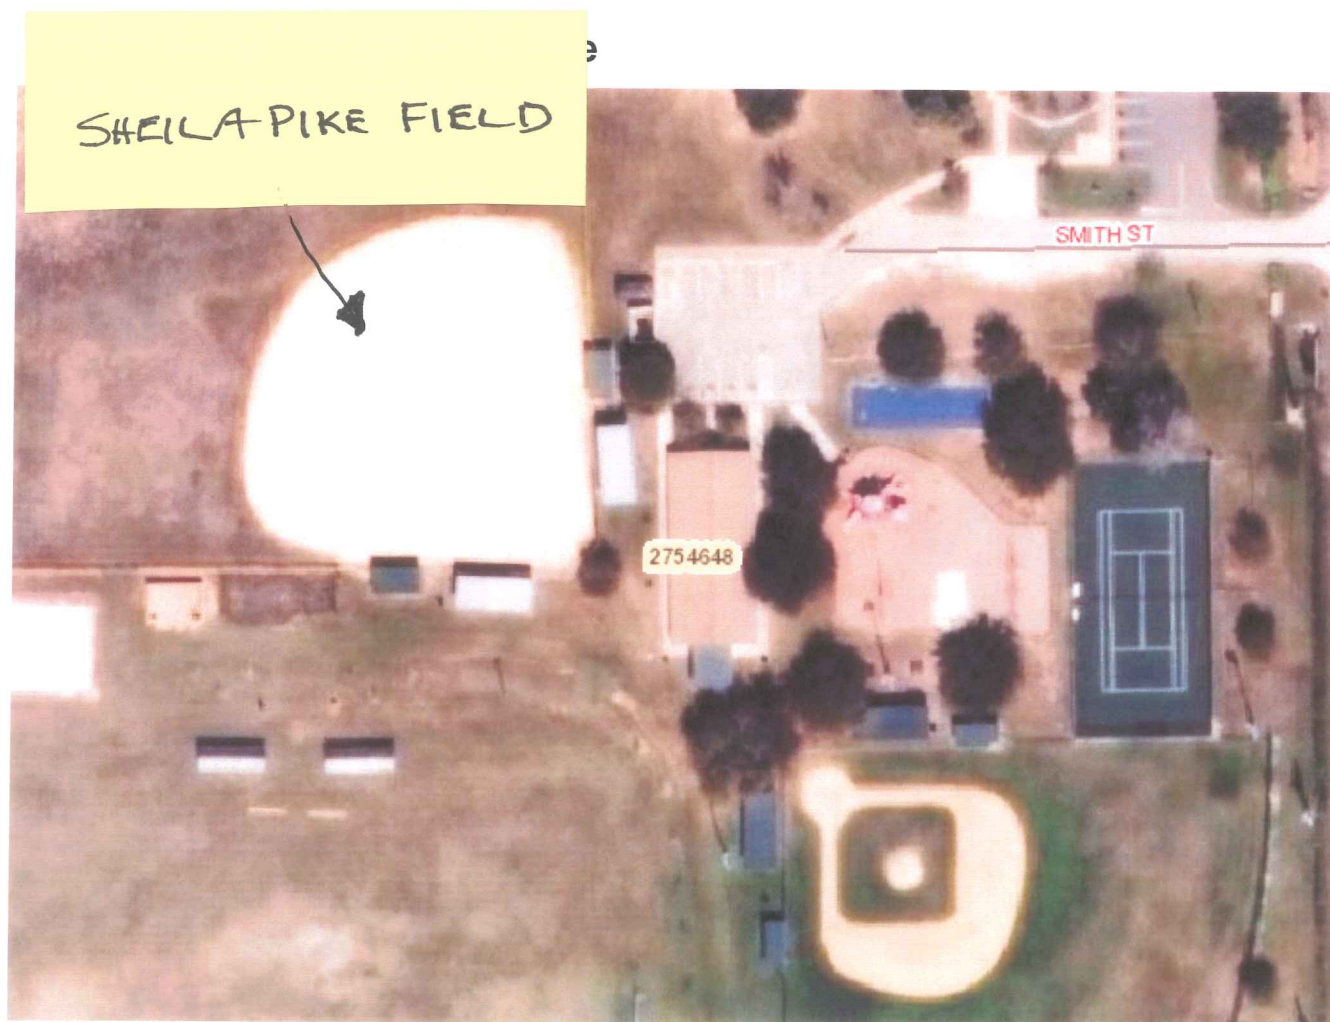

MAP LOCATION-

ASTOR LIONS PARK - SHEILA PIKE  
FIELD

54835 ALCO ROAD

ASTOR, FL 32102