

3'- 6" Galvanized Safety Fence – Fence

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary to furnish, deliver and install 270 lineal feet of 3'- 6" galvanized metal painted black safety fence on Field # 4 at the Minneola Athletic Complex- 1300 Fosgate Rd. Minneola, FL 34715. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Misc. Items to be noted:

- See attached drawings for details
- Metal primed and painted black
- 7 FT maximum spacing
- 3/4" X 3/4" galvanized metal pickets
- Posts – 2" X 4" X 1/4 "wall Rectangular Tube
- Saw cutting the existing sidewalk concrete and proper disposal of debris
- All work must be completed within 15 days of issuance of purchase order
- Safety fence to be installed on the top of the existing wall
- Removal of the existing fence is part of this RFQ
- **See attached location site map**

- 1.02 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions prior to fabrication and installation.


PART III – EXECUTION

3.01 WORKMANSHIP:

- A. All materials are subject to the approval of the County.
- B. All products shall be inspected by the County for damage and chipped or marred finish. Contractor shall replace any damaged or rejected products at no conditional cost to the owner.

LITTLE LEAGUE BASEBALL

Field #4

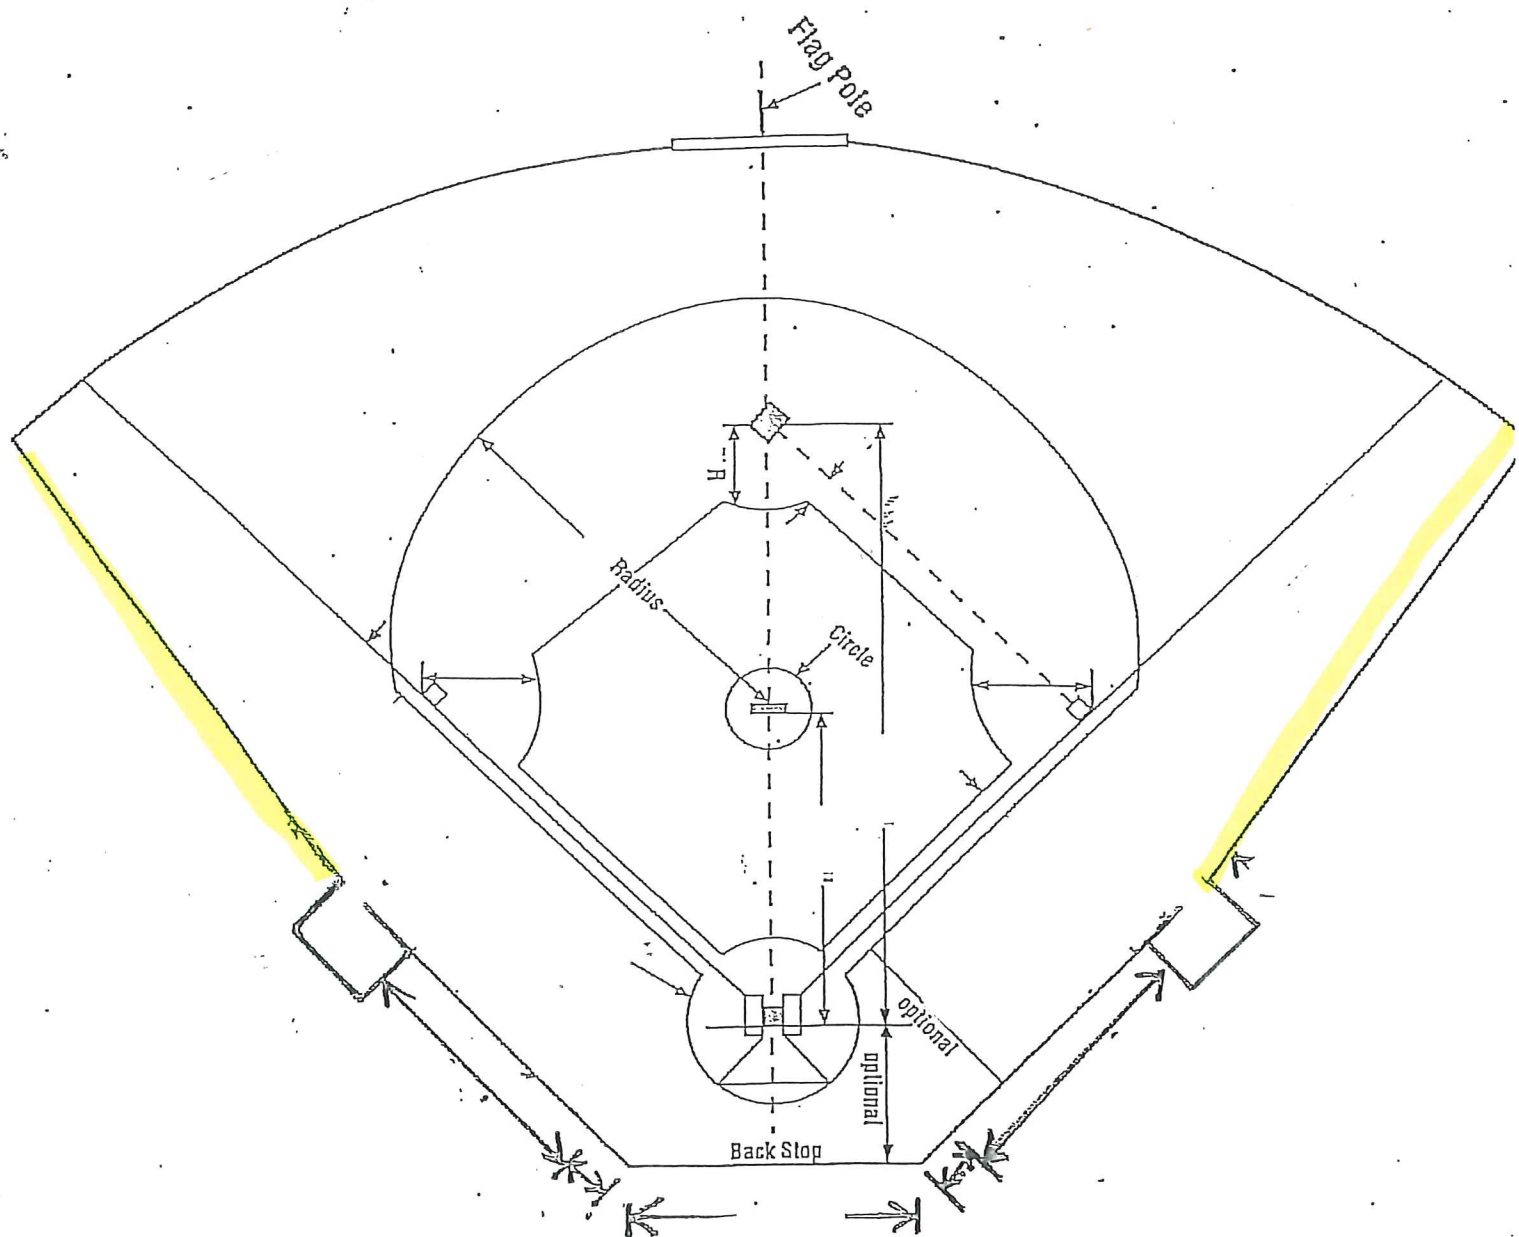


Minneola Athletic Complex

SOUTH LAKE COMMUNITY PARK




LAKE COUNTY
FLORIDA

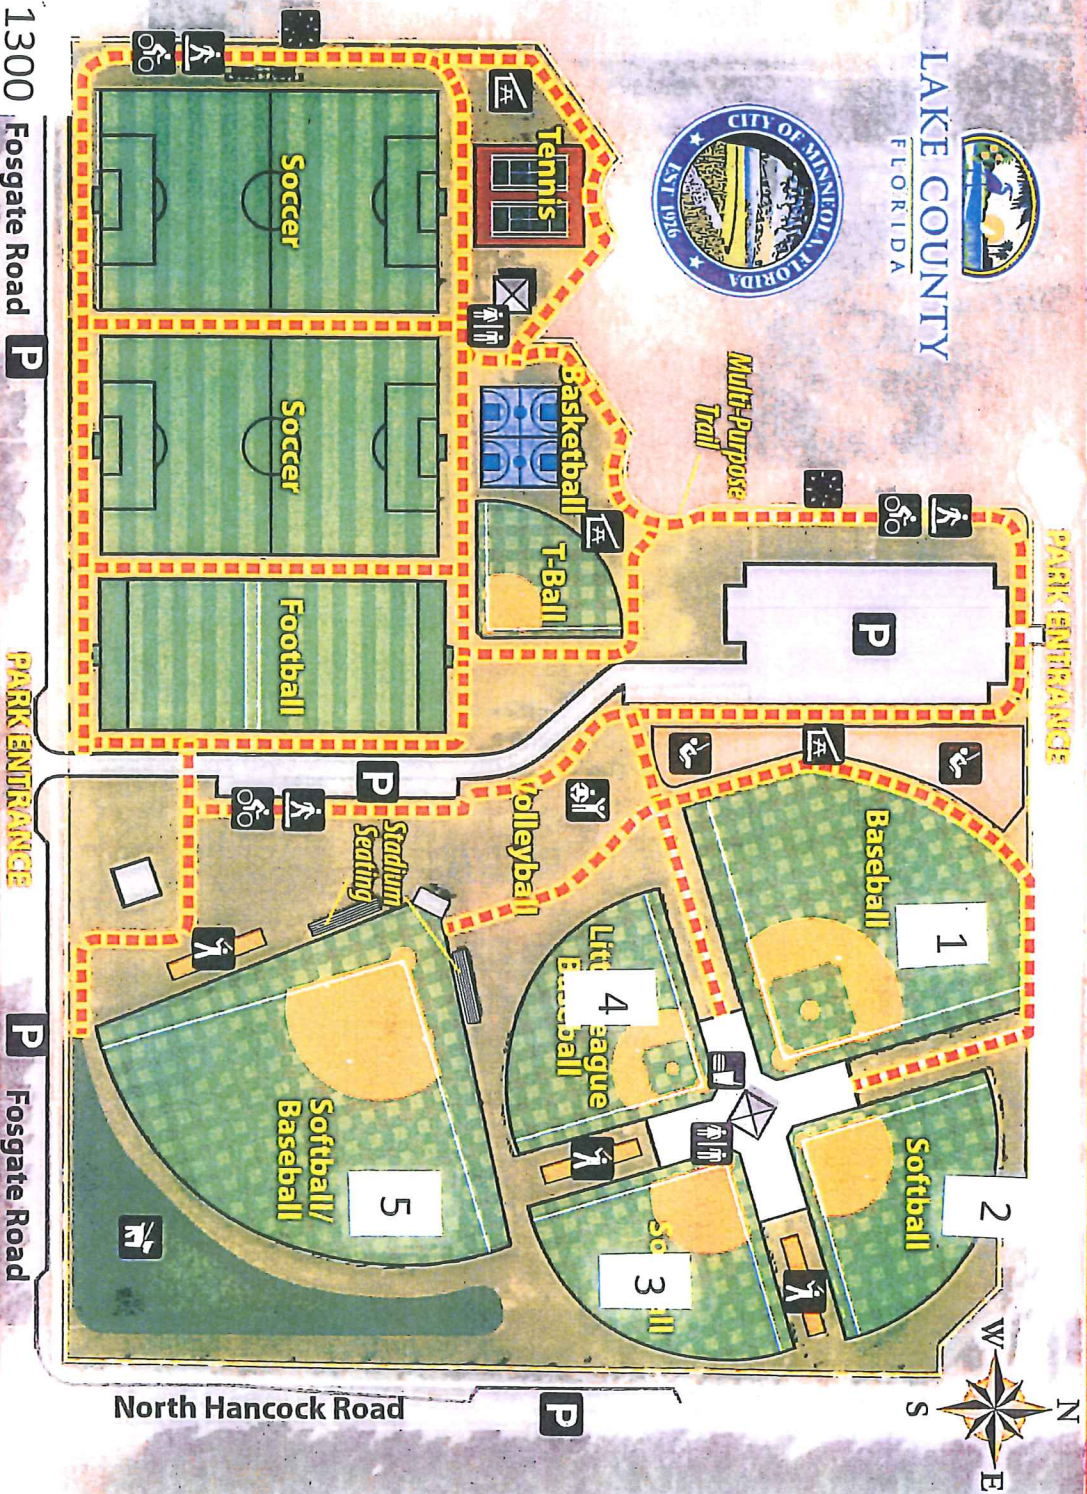

SITE DIRECTORY

- Parking**
- Restroom**
- Exercise Station**
- Pavilion**
- Playground**
- Concession**
- Dog Park**
- Path Lighting (Typical)**
- Batting Cages**
- Multi-Use Trail**

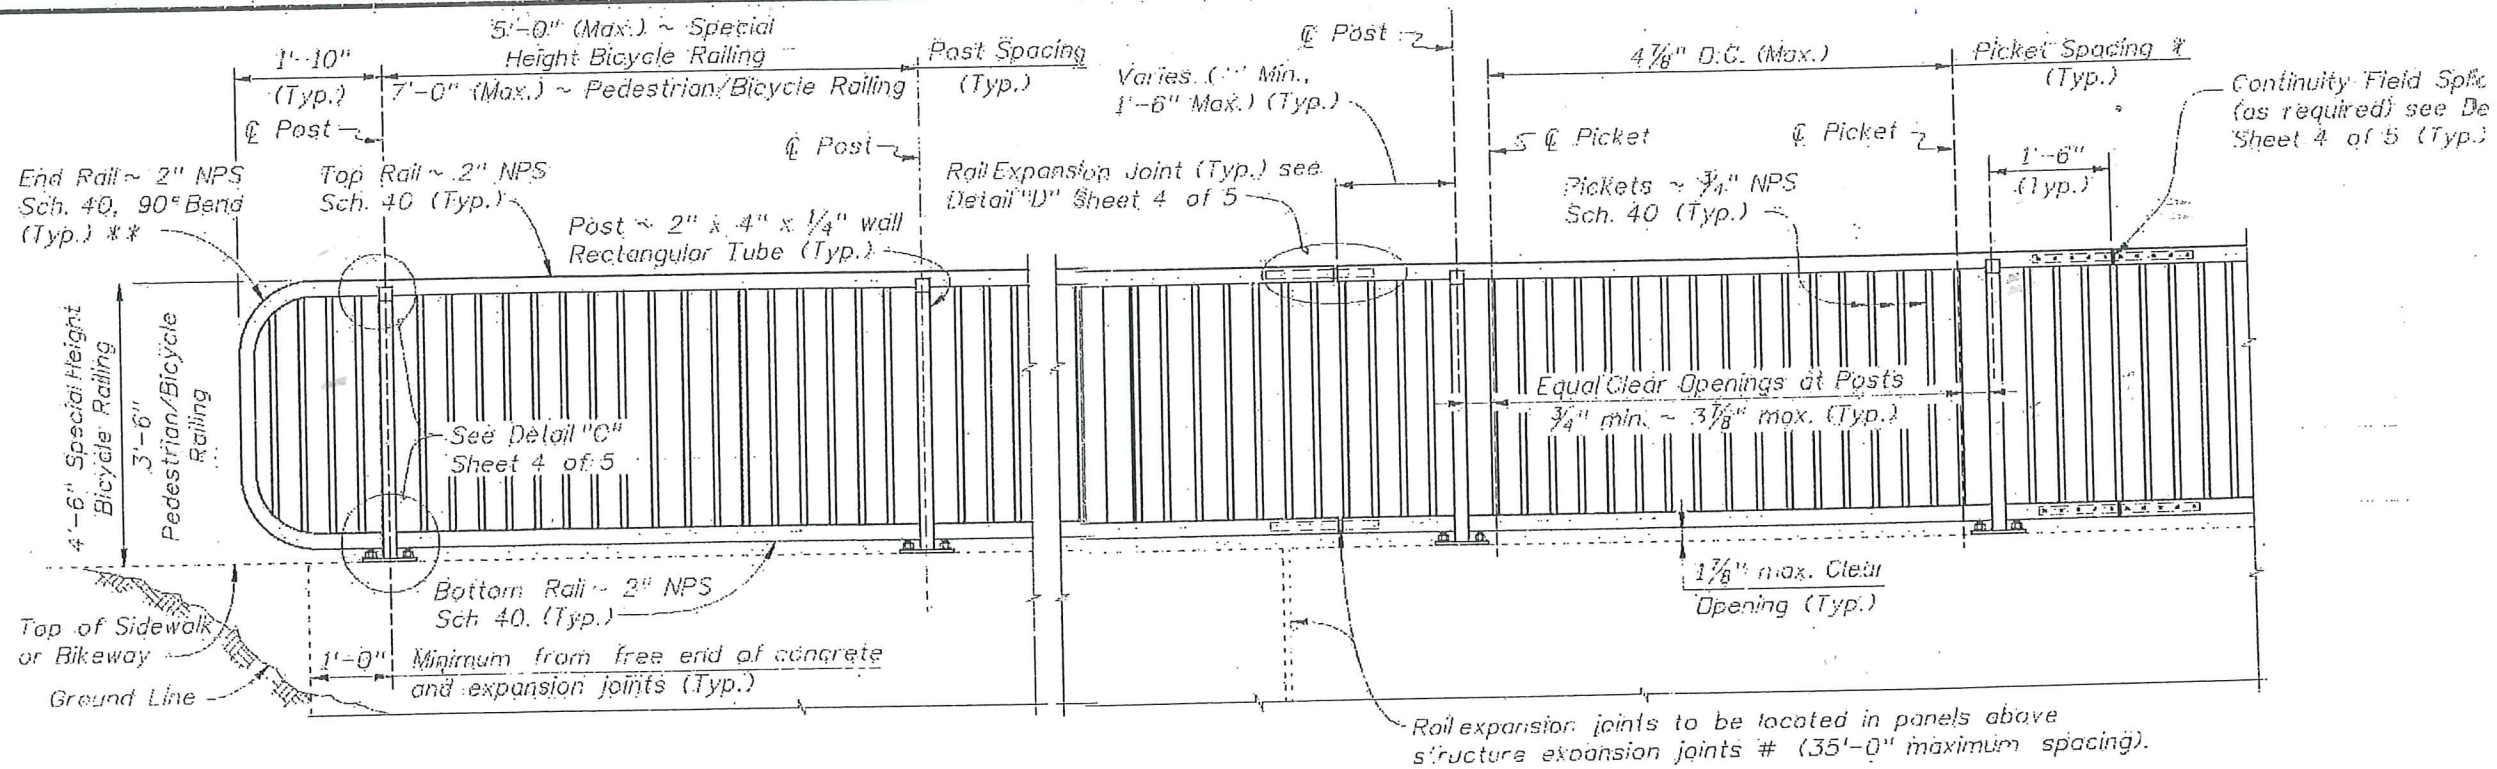

ELEVATION
(Showing Outside Face of Railing)

TYPICAL RAILING DETAILS & RAILINGS ON GRADES 0% TO 5%