


## **Traffic Calming Speed Humps for Various County Parks**

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary to furnish, deliver and install ten (10) new Traffic Calming Speed Humps for Various County Parks. All work shall be in strict compliance with the attached contract drawings and manufacturer's recommendations.

### **Misc. Items to be noted:**

- Traffic Calming Speed Humps to match similar installation at Lake Idamere Park-12335 CR 448 Tavares, FL 32778.
  - Install ten (10) - 20 LF Long X 3 FT Wide X 2 INCH High Traffic Calming Speed Hump with Black End Cap ( Modeled 3CZ3016/17 by Speed Bumps & Humps)
  - See attached photos for product verification and hardware required.
  - No substitutions permitted.
  - Final location to be determined by Parks & Trails Division.
- 1.02 FIELD CONDITIONS: Verify and coordinate all work to locations and dimensions.
- 1.03 SUBMITTALS:
- A. All submittals to be approved by Parks & Trails Division prior to contractor delivering materials to site.
- 3.01 WORKMANSHIP:
- A. All work and materials are subject to the approval of the County.
- B. All work described herein shall be installed by qualified tradesman.
- 3.2 ACCEPTANCE:
- A. The County will review each installation to determine compliance with location and product specification, prior to final acceptance of the work.
- 3.3 CLEANING:
- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris and equipment.

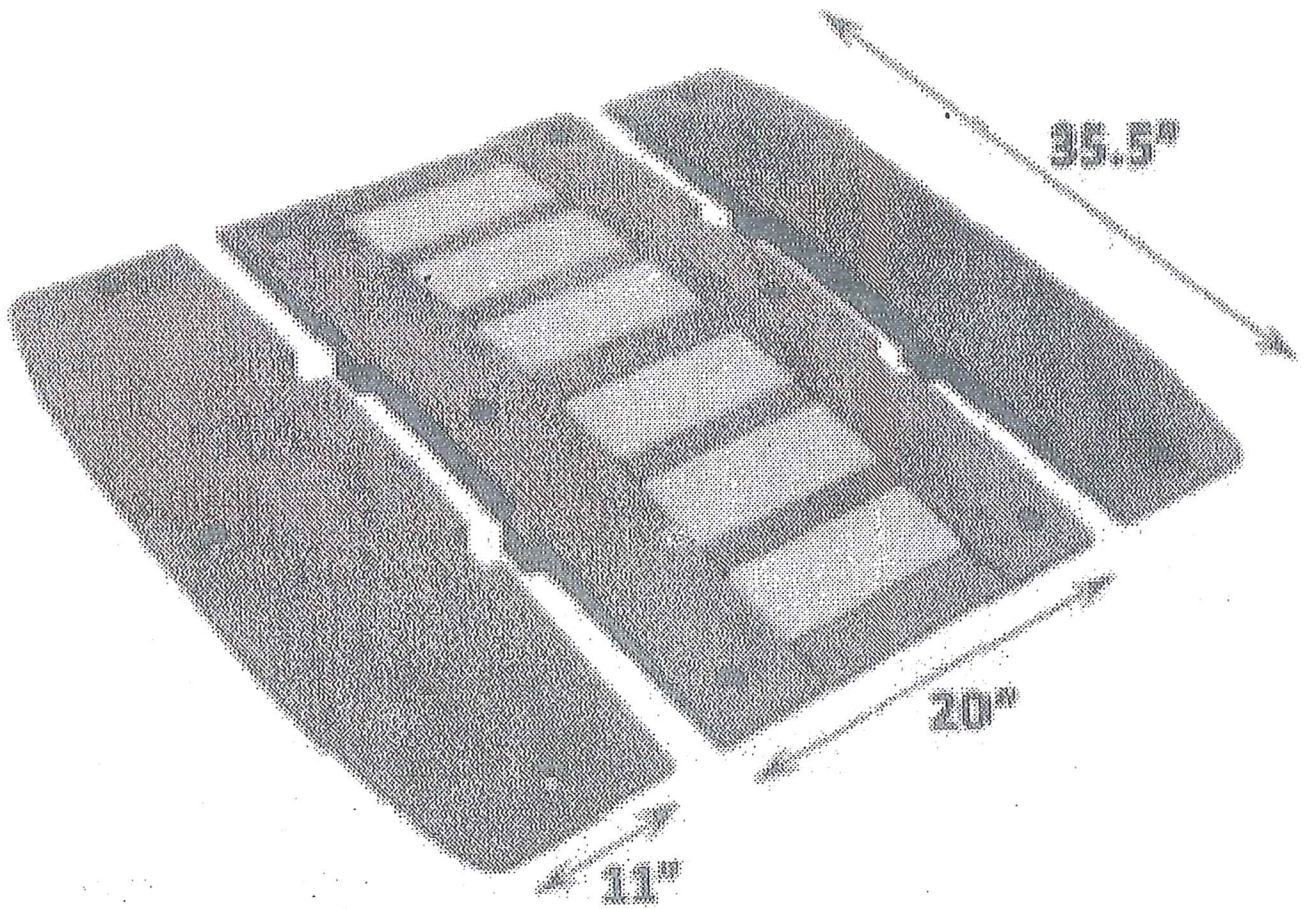

TRAFFIC CALMING SPEED HUMPS

CONSTRUCT 24 LF OF 3-FT WIDE X 2-INCH HIGH TRAFFIC CALMING  
SPEED HUMPS WITH BLACK END CAP (MODELED 3ZC3016/17 BY  
SPEED BUMPS AND HUMPS

N. T. S.





Photo  
#1



Photo # 2





Photo # 3

