

## **Furnish and Delivery of Two (2) New Aluminum Bleachers for Miracle Field at Lake Idamere Park**

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary for the furnishing and delivery of two (2) new aluminum dugout bleachers for use at Miracle Field at Lake Idamere Park. All furnishings shall be in strict compliance with the latest codes, standards and practices.

### **Misc. Items to be noted:**


- Portable spectator bleachers
- Must submit photo/sample of product for approval
- See attached picture for details (Center isle & handrail not included)
- 5 Row (50 seat) 15 FT. LONG bleachers. Galvanized frames with aluminum planks with footboards.
- 10 INCH wide non-skid aluminum seat planks.
- **Aluminum vertical picket guardrail**
- **No installation required.**
- **Delivery to Lake County Parks Office- 12929 County Landfill Rd. Tavares, FL 32778.**
- **Contact Chris Macdonald (352) 460-2902, 72 hours before delivery**
- **No substitutions in this bid**

### 1.02 SUBMITTALS:

- A. Submit product data/specification to Park and Trails Division for review and approval of all items of work.

### 1.03 PRODUCT HANDLING:

- A. Deliver products to site in manufacturer's containers or packaging.  
B. No assistance from County staff for delivery or off-loading. (No forklift on site)

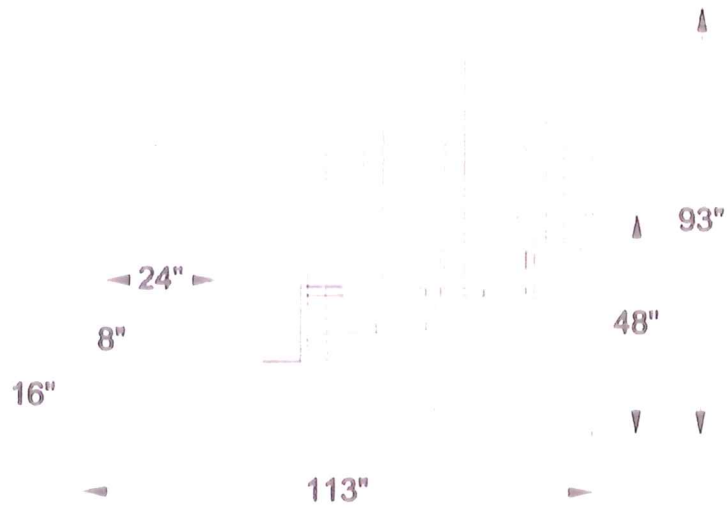

## SPECIFICATIONS

Name	Std 8 inch Rise, 5 Row Galv , 48 inch high
Seats	50
Rows	5
Length	15 feet
Rise	8 inch/Row
Style	Aluminum, 2 x 10 seat plank
Weight	1494 lbs
Railings	Yes
Footboards	Double, Aluminum
Aisle	48" w/Handrail

Center stairs & rail not required

Sample only

