

**Title: Clearing and finished grading for little league baseball fields**

**SCOPE OF SERVICES:**

**Pine Forest Park - 32520 SR 44, Deland Fl**

The contractor shall furnish all labor, equipment, materials, fuel and any other incidental costs, and supervision necessary for the survey, layout, clearing, grubbing, cut and fill, finished grading, rolling and compaction of fill material that is of uniform quality for common areas, little league fields and a 60 ft footprint leading to the silt fencing.

The Contractor under this bid is responsible for cutting out and leaving an 8" depression for future clay installation by others at warning track and infield.

The vendor shall furnish an equipment list. If, in the opinion of the County's Project Manager, the vendor has insufficient equipment to satisfactorily complete the work the vendor shall provide additional equipment as directed by the County's Project Manager. .

**Misc. Items to be noted:**

The existing fencing and curb to remain.

Clear & Grub 60 FT minimum outside the perimeter of the little league fields.

Silt fencing to be installed as per attached drawings.

Signage is not part of this bid.

Concrete curbs and wheel stops are not part of this bid.

Pavement markings are not part of this bid.

Sodding is not part of this bid.

Drawings shall be printed full size (24x36) for proper estimating.

Finished grading shall be flush with existing fill dirt parking lot

Furnishing and installation of clay at infields and warning tracks not part of this bid.

No fencing required for this bid.

- 1.01 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions. Only Sheets L1.00, L1.01, L3.01 are required for this bid.**

## 2.01 WORKMANSHIP:

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.

## 3.01 ACCEPTANCE


- A. The County will review each installation to determine compliance with plans and specifications prior to final acceptance of the work.
- B. Any work not installed in accordance with the plans and specifications and rejected by the County shall be removed and replaced at the Contractor's expense.

## 3.02 GUARANTEES

- A. The contractor shall furnish warranties in writing certifying that the quality and workmanship of all materials and installation furnished is in accordance with these specifications and in accordance with the original manufacturers' warranties. The contractor shall warrant the installation workmanship for a period of one year from the date of final acceptance of the job, or any accepted portion of the job.

## 3.03 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.

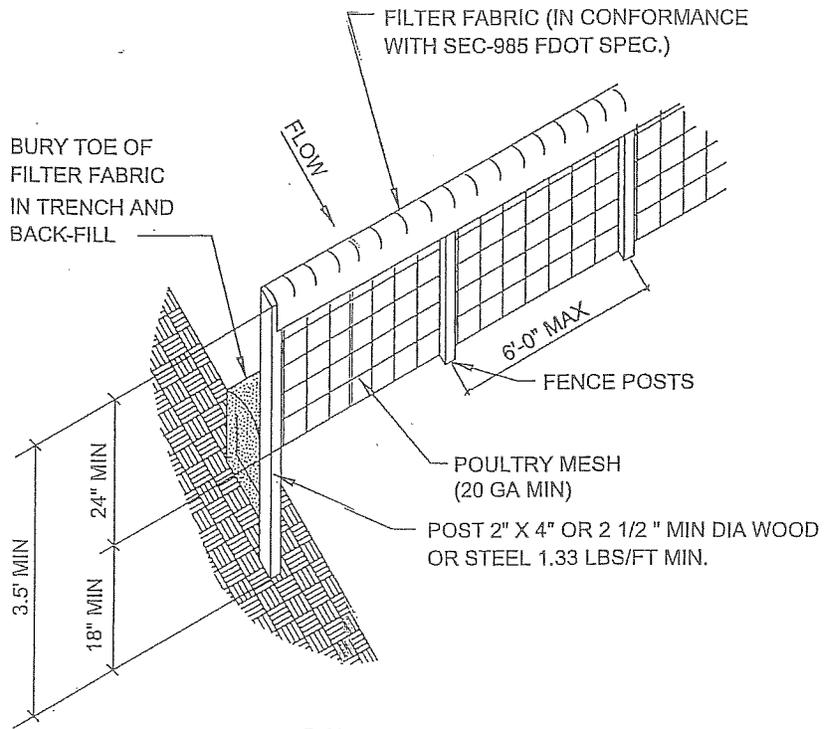

## SILT FENCE DETAIL

NTS