

Playground Equipment Repairs

1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary to furnish and install two (2) new playground slides & 1 (one) new display panel and to remove the existing 2 (two) playground slides (see photos P1 & P2) and 1 (one) damaged display panel (P3) at North Lake Community Park- 40730 Roger Giles Rd. Umatilla, FL. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Misc. Items to be noted:

- Field verification by contractor is recommended
- Concrete footers as recommended by manufacturer.
- Proper disposal of damaged products off County property.
- All work to be completed within 30 days of issuance of P.O.
- Approved equal is also acceptable upon approval of the Parks & Trails Division
- See attached map for locations

1.02 SUBMITTALS:

A. Submit product data/specification and shop drawings to Park and Trails Division for review and approval of all items of work.

1.03 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions. Custom fit playground products to match damaged / broken playground parts. (P- 1, P- 2, P- 3)

1.04 PRODUCT HANDLING:

A. Deliver products to site in manufacturer's containers or packaging.

B. Store in secure and weather protected area.

C. Return all damaged products to manufacturer.

PART III – EXECUTION

3.01 WORKMANSHIP:


A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.

- B. All work and materials are subject to the approval of the County.
- C. All products shall be inspected by the County for damage and chipped or marred finish. Contractor shall replace any damaged or rejected products at no conditional cost to the owner. The owner's representative may at his option authorize acceptance of chipped or scratched painted surfaces repaired by contractor at his own risk.

3.02 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.

North Lake Regional Park

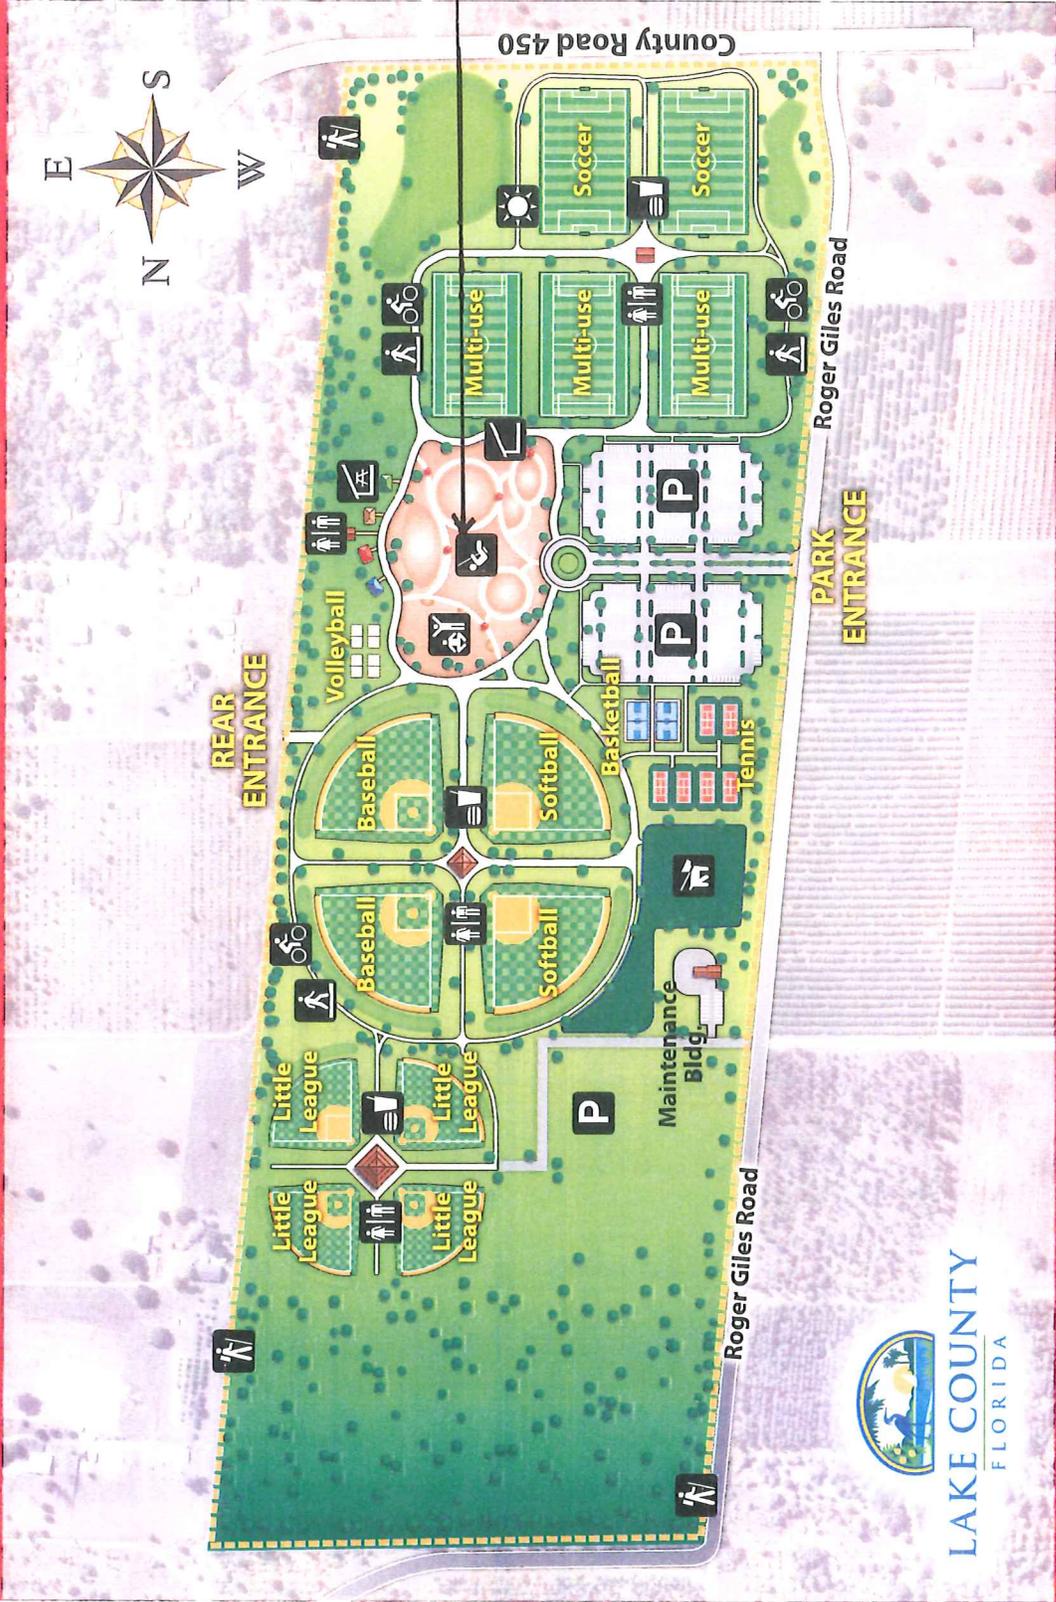

TOTAL ACRES: 115

SITE DIRECTORY

- Parking**
- Restroom**
- Concession**
- Shelter**
- Pavilion**
- Multi-Use Trail**
- Exercise Station**
- Playground**
- Hiking Trail**
- Dog Park**
- Path Lighting (Typical)**



P-1



P-2

STOP



P-3

UNION LAND