

**Driveway Repair for Little League Field
North Lake Community Park- 40730 Roger Giles Rd. Umatilla, FL 32784**

PART 1: GENERAL DESCRIPTION

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary for the site preparation, grading, compaction with of existing lime rock sub base and complete installation of 75 FT. long X 24 FT wide of 1 ½ " Type S III Asphaltic pavement. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Specific work items to be performed:

- Field verification by Contractor is recommended
- Grading to be performed as required to ensure positive water drainage.
- Site preparation will be required.
- 75 FT. LONG X 24 FT. Wide to a 40 FT. Wide flare
- 1 ½ INCH thick Type S-III Asphaltic pavement.
- Park will remain open during the installation process.
- Flare on West side of driveway.
- Six (6) INCH Double yellow traffic lines

1.02 FIELD CONDITIONS:

Verify and coordinate all work to field locations and dimensions. Contractor is responsible for the installation of temporary construction fencing and signage to safely enclose the work area.

PART III – EXECUTION

3.01 WORKMANSHIP:

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.
- C. All products shall be inspected by the County for damage and chipped or marred finish. Contractor shall replace any damaged or rejected products at no additional cost to the owner. The owner's representative may at his option

authorize acceptance of chipped or scratched painted surfaces repaired by contractor at his own risk.

3.02 INSTALLATION:

Install furnishing in locations as indicated on the plans and details. Assure that all furnishings are installed plumb and level and in accordance with the plans and details. Install all items supplied as per manufacturer's specifications.

3.03 ACCEPTANCE

A. The County will review each installation to determine compliance prior to final acceptance of the work. Any work not installed in accordance with the plans and specifications and rejected by the County shall be removed and replaced at the Contractor's expense.

3.04 GUARANTEES:

The Contractor shall furnish warranties in writing certifying that the quality and workmanship of all materials and installation furnished is in accordance with these specifications and in accordance with the original manufacturer's warranties. The Contractor shall warrant the installation workmanship for a period of one (1) year from the date of final acceptance of the job, or any accepted portion of the job.

3.05 CLEANING

A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.


3.06 PERMIT REQUIREMENTS:

Permits are not required for the above described effort.



North Lake Community Park

work
Location

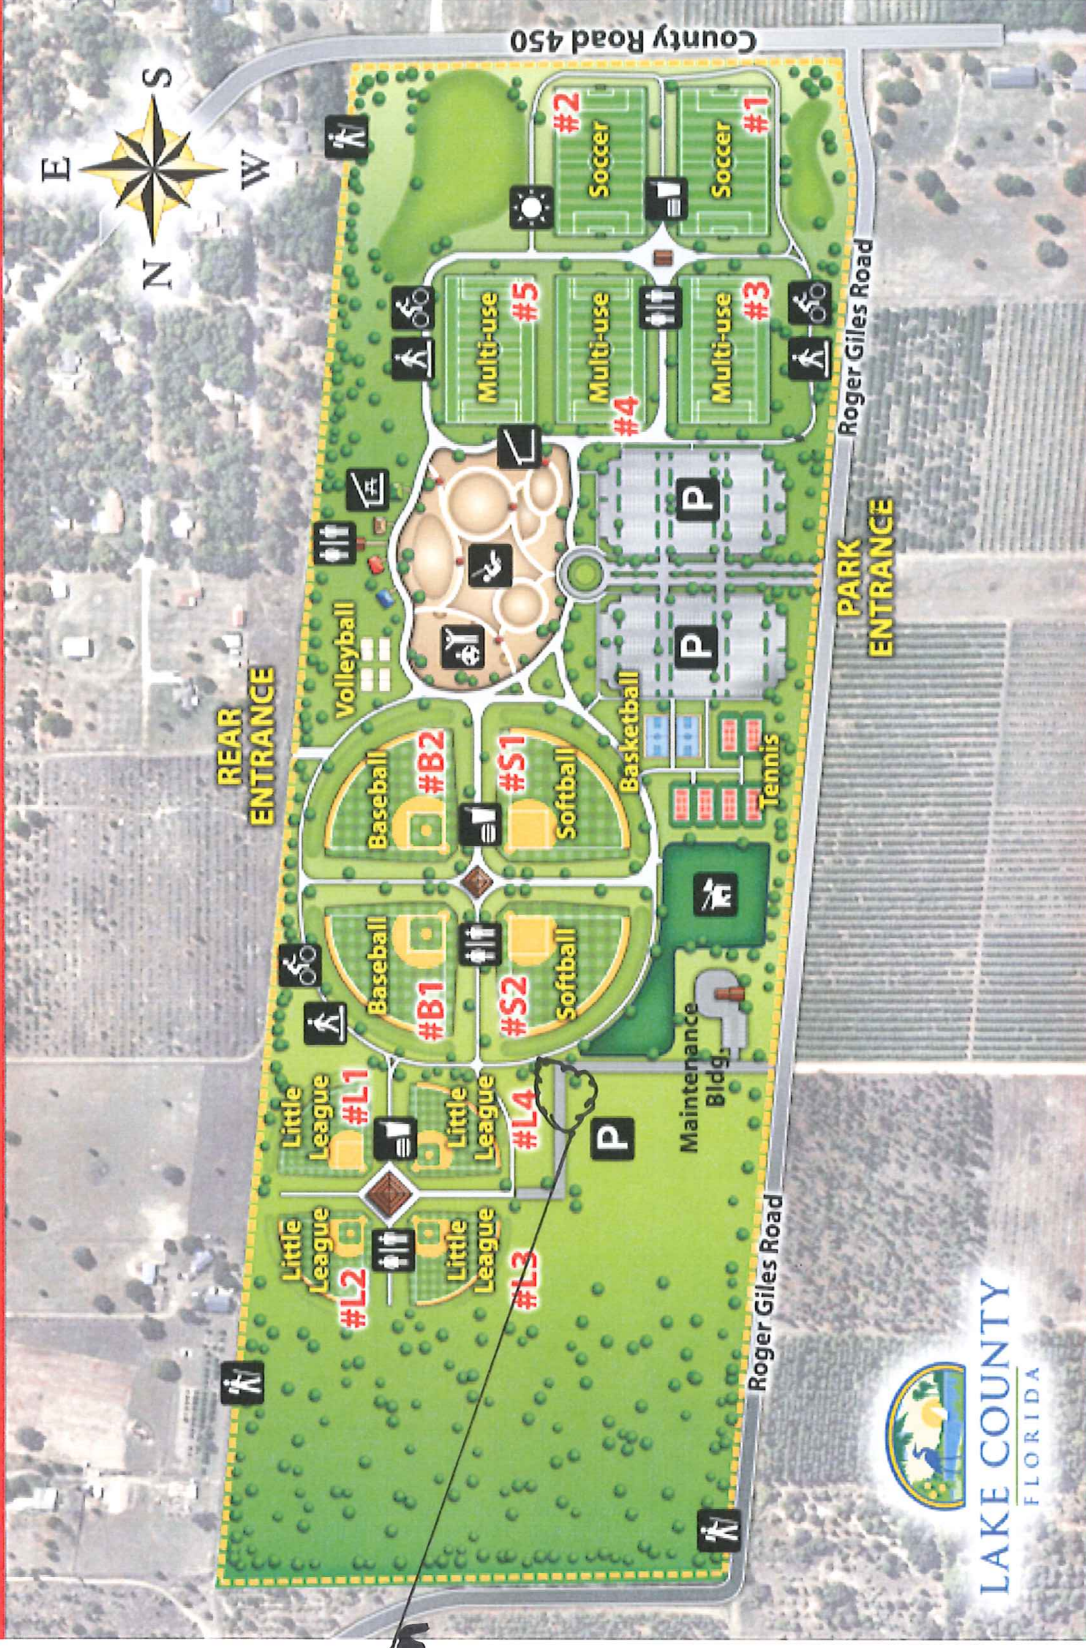

SITE DIRECTORY

TOTAL ACRES: 115

- | | |
|------------------------|-----------------------------------|
| P Parking | Dog Park |
| Restroom | Path Lighting
(Typical) |
| Concession | Exercise Station |
| Shelter | Playground |
| Pavilion | Hiking Trail |
| Multi-Use Trail | |