

## **Overhead Protective Netting at East Lake Community Park**

- 1.01 SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary for furnishing, delivery and installation of Overhead Protective Netting at East Lake Community Park- 24809 Wallick Road, Sorrento, FL. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

### **Misc. Items to be noted:**

- **Field verification required by Contractor for inspection and measurements of square footage.**
- **1-3/4" square mesh ( See photo #1)**
- **#18 Black Twisted Knotted Nylon.**
- **1 FT. X 1 FT. sample required prior to issuance of purchase order.**
- **Tensil strength: 191 lb.**
- **Provide pockets at each backstop to retrieve balls.**
- **Hardware including all fasteners & cables deemed part of the bid and must be approved by the Parks & Trails Division prior to installation.**
- **All work must be completed within 15 days from the issuance of the purchase order or notice to proceed**

### **1.02 SUBMITTALS:**

- A. All submittals to be approved by Parks and Trails Division prior to contractor delivering materials to site.

### **1.03 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions.**

### **1.04 PRODUCT HANDLING:**

- A. Deliver products to site in manufacturer's containers or packaging.
- B. Store in secure and weather protected area.
- C. Return all damaged products to manufacturer.

## **PART III – EXECUTION**

### **3.01 WORKMANSHIP:**

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.
- C. All products shall be inspected by the County for damage. Contractor shall replace any damaged or rejected products at no additional cost to the owner. The owner's representative may at his option authorize acceptance of repairs by contractor at his own risk.

### 3.1 INSTALLATION

- A. Install as per manufacturer's specifications

### 3.2 ACCEPTANCE

- A. The County will review each installation to determine compliance prior to final acceptance of the work.
- B. Any work rejected by the County shall be removed and replaced at the Contractor's expense.


### 3.3 GUARANTEES

- A. The contractor shall furnish warranties in writing certifying that the quality and workmanship of all materials and installation furnished is in accordance with these specifications and in accordance with the original manufacturers' warranties. The contractor shall warrant the installation workmanship for a period of one year from the date of final acceptance of the job, or any accepted portion of the job.

### 3.4 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, debris and equipment.



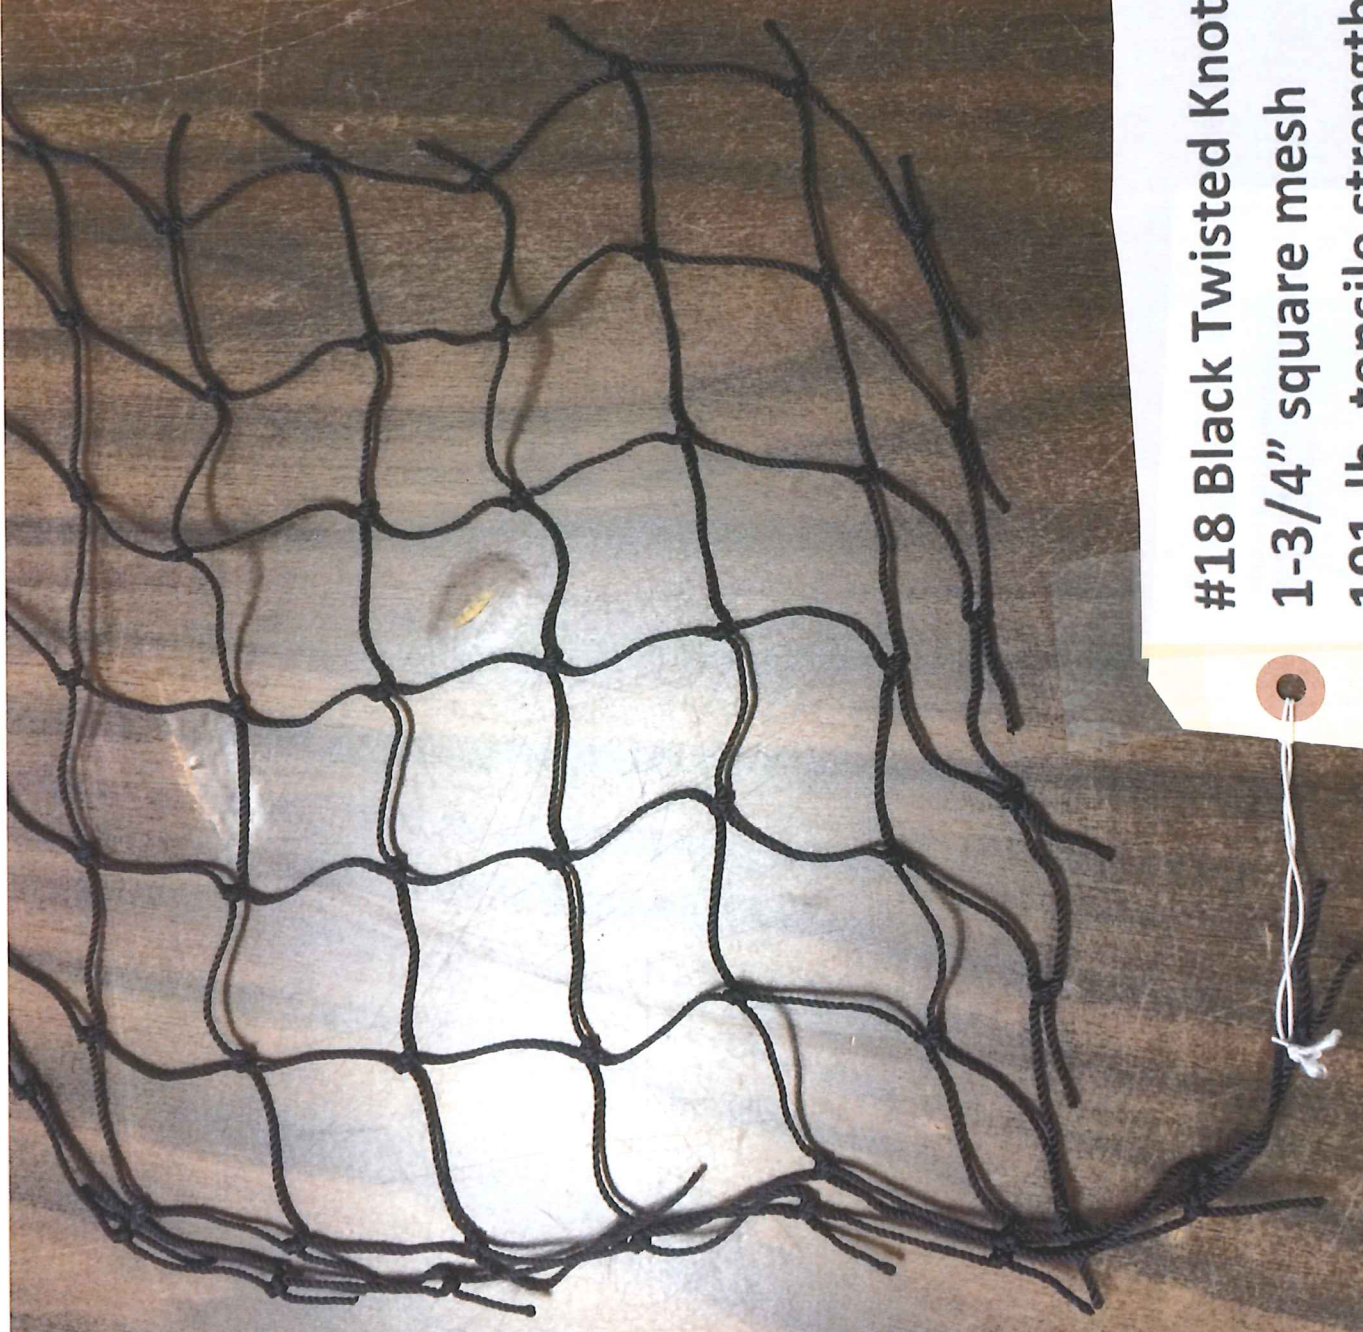

**#18 Black Twisted Knotted Nylon**  
**1-3/4" square mesh**  
**191-lb. tensile strength**

P-1






WORK  
AREA

East Lake  
Community Park



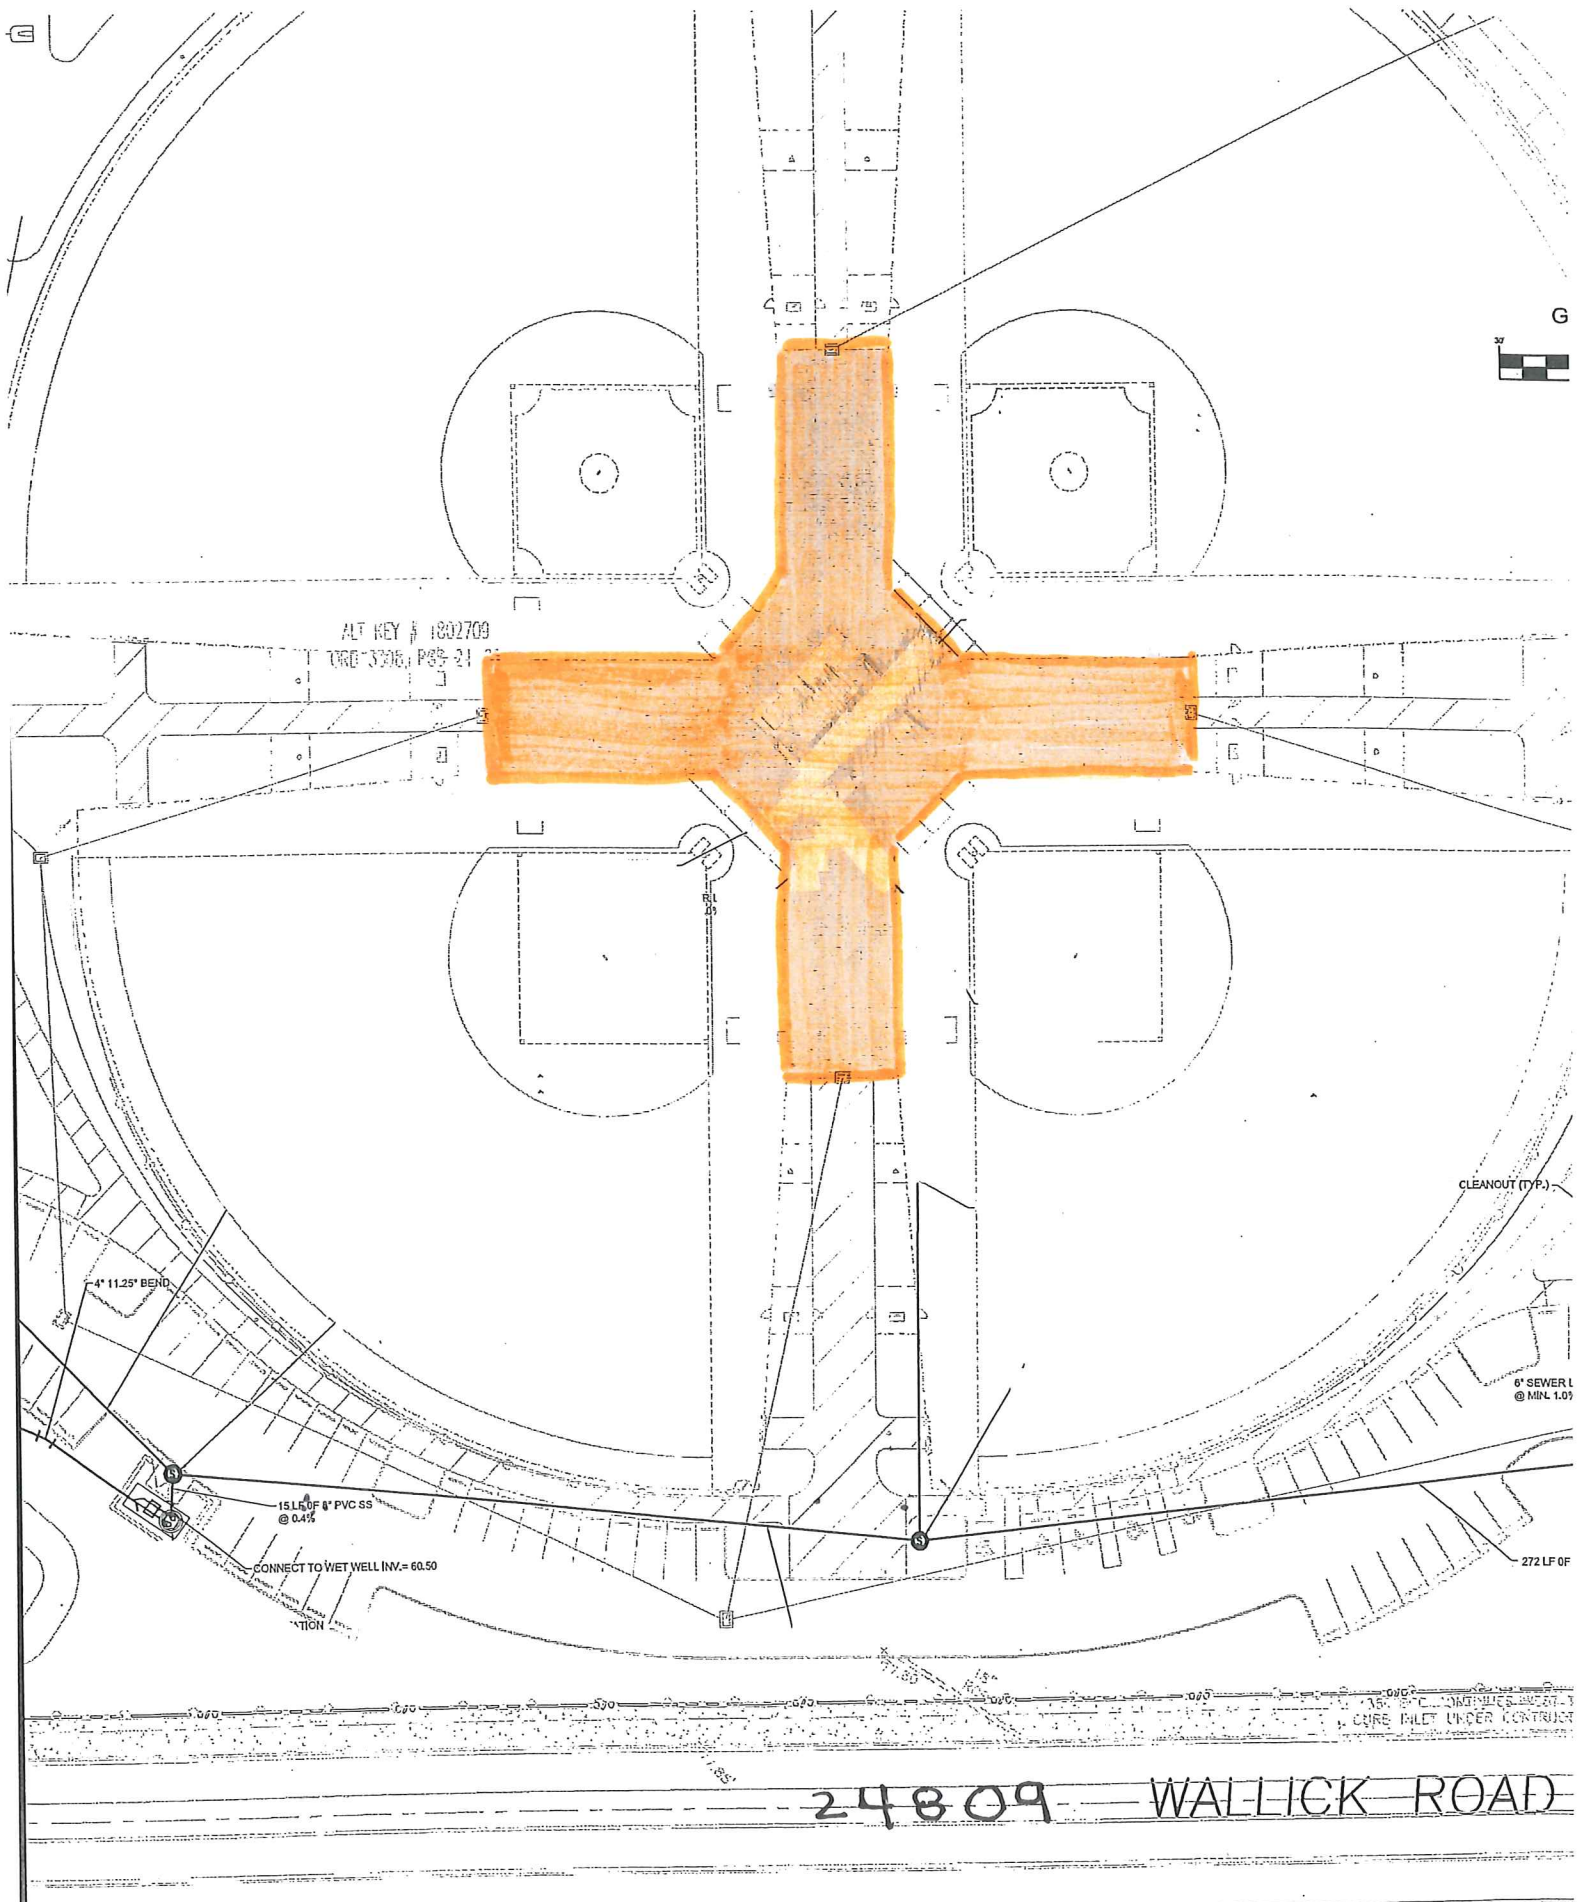

ALT KEY # 1802709  
TRD-3308, PGS 21

CLEANOUT (TYP.)

6" SEWER L  
@ MIN. 1.0%

272 LF OF

15 LF OF 8" PVC SS  
@ 0.4%  
CONNECT TO WET WELL INV. = 60.50

ATION


15' 8" C. CONTIGUOUS SECT. 1  
CURE INLET UNDER CONSTRUCT

24809 WALLICK ROAD

work Area for  
Protective Netting



# East Lake Community Park

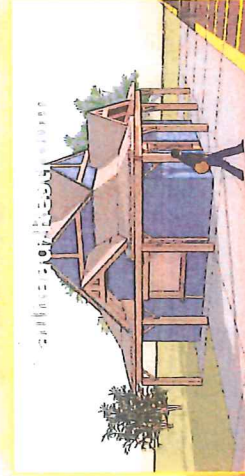

TOTAL ACRES: 34

## SITE DIRECTORY

**P** Parking

Multi-Use Trail

Restroom

Exercise Station

Pavilion

Playground

Dog Park

Concession

Batting Cages