

South Lake Trail Wooden Boardwalk Repairs

- 1.01 **SCOPE OF WORK:** Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary to remove and dispose of the existing 460 Linear feet of Boardwalk decking, Handrail & Bottom Rail & 6" X 6" wooden curbing and replace with new pressure treated lumber with exterior hot galvanized stainless steel screws on the South Lake Trail located on County Road 455 North of Hwy # 50 In Clermont, FL 34715. All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Misc. Items to be noted:

- Field verification by Contractor recommended.
- Work to be completed within 15 days after issuance of Purchase Order.
- **Remove the existing 6" X 6" wood curbing and replace with new pressure treated 4" X 4" curbing.**
- **Remove the existing 2" X 6" bottom rail and replace with 2" X 10" pressure treated wood (See attached photo P #2)**
- **Replace all deck boards (2 INCH Thick X 8 INCH Wide X 10 FT. LONG) See attached photos for details.**
- **Replace all hand rail (2 INCH Thick X 6 INCH Wide) length varies.**
- **Contractor to verify condition of existing joists (2 INCH Thick x 10 INCH Wide) & spindles (1 ½ INCH X 1 ½ INCH) and replace as necessary deemed included in this bid.**
- **Secure all pressure treated wood with Exterior hot galvanized stainless steel screws (Flathead).**
- **Work area must be cautioned off at all times.**
- **Work areas under repair, must be completed daily and left open for public use at the end of each work day.**
- **Only remove what you can repair at the end of each day.**
- **Boardwalk to be reopened daily for public use.**

- 1.02 **FIELD MEETING:** Coordinate all work with Chris Macdonald (352) 460-2902 Lake County Parks & Trails. 72 hour prior notice required.

1.03 SUBMITTALS:

- A. Submit product samples to Parks & Trails Division for review and approval prior to Contractor delivering materials to site. (No storage of material at site is allowed).

1.04 ACCEPTANCE:

- A. The County's Parks & Trails Division will review each installation to determine compliance prior to final acceptance of the work.

PART III – EXECUTION

3.01 WORKMANSHIP:

- A. All repair work described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.

3.02 CLEANING:

- A. Contractor to perform cleaning during daily installation of the work & upon completion of the work. Remove from site all excess materials, debris & equipment.


← HANDRAIL → TYPICAL

Remove 2"x6"
Replace 2"x10"

Remove existing
6"x6" wood
curbing replace
with PT 4"x4"
wood.



Reference Photo

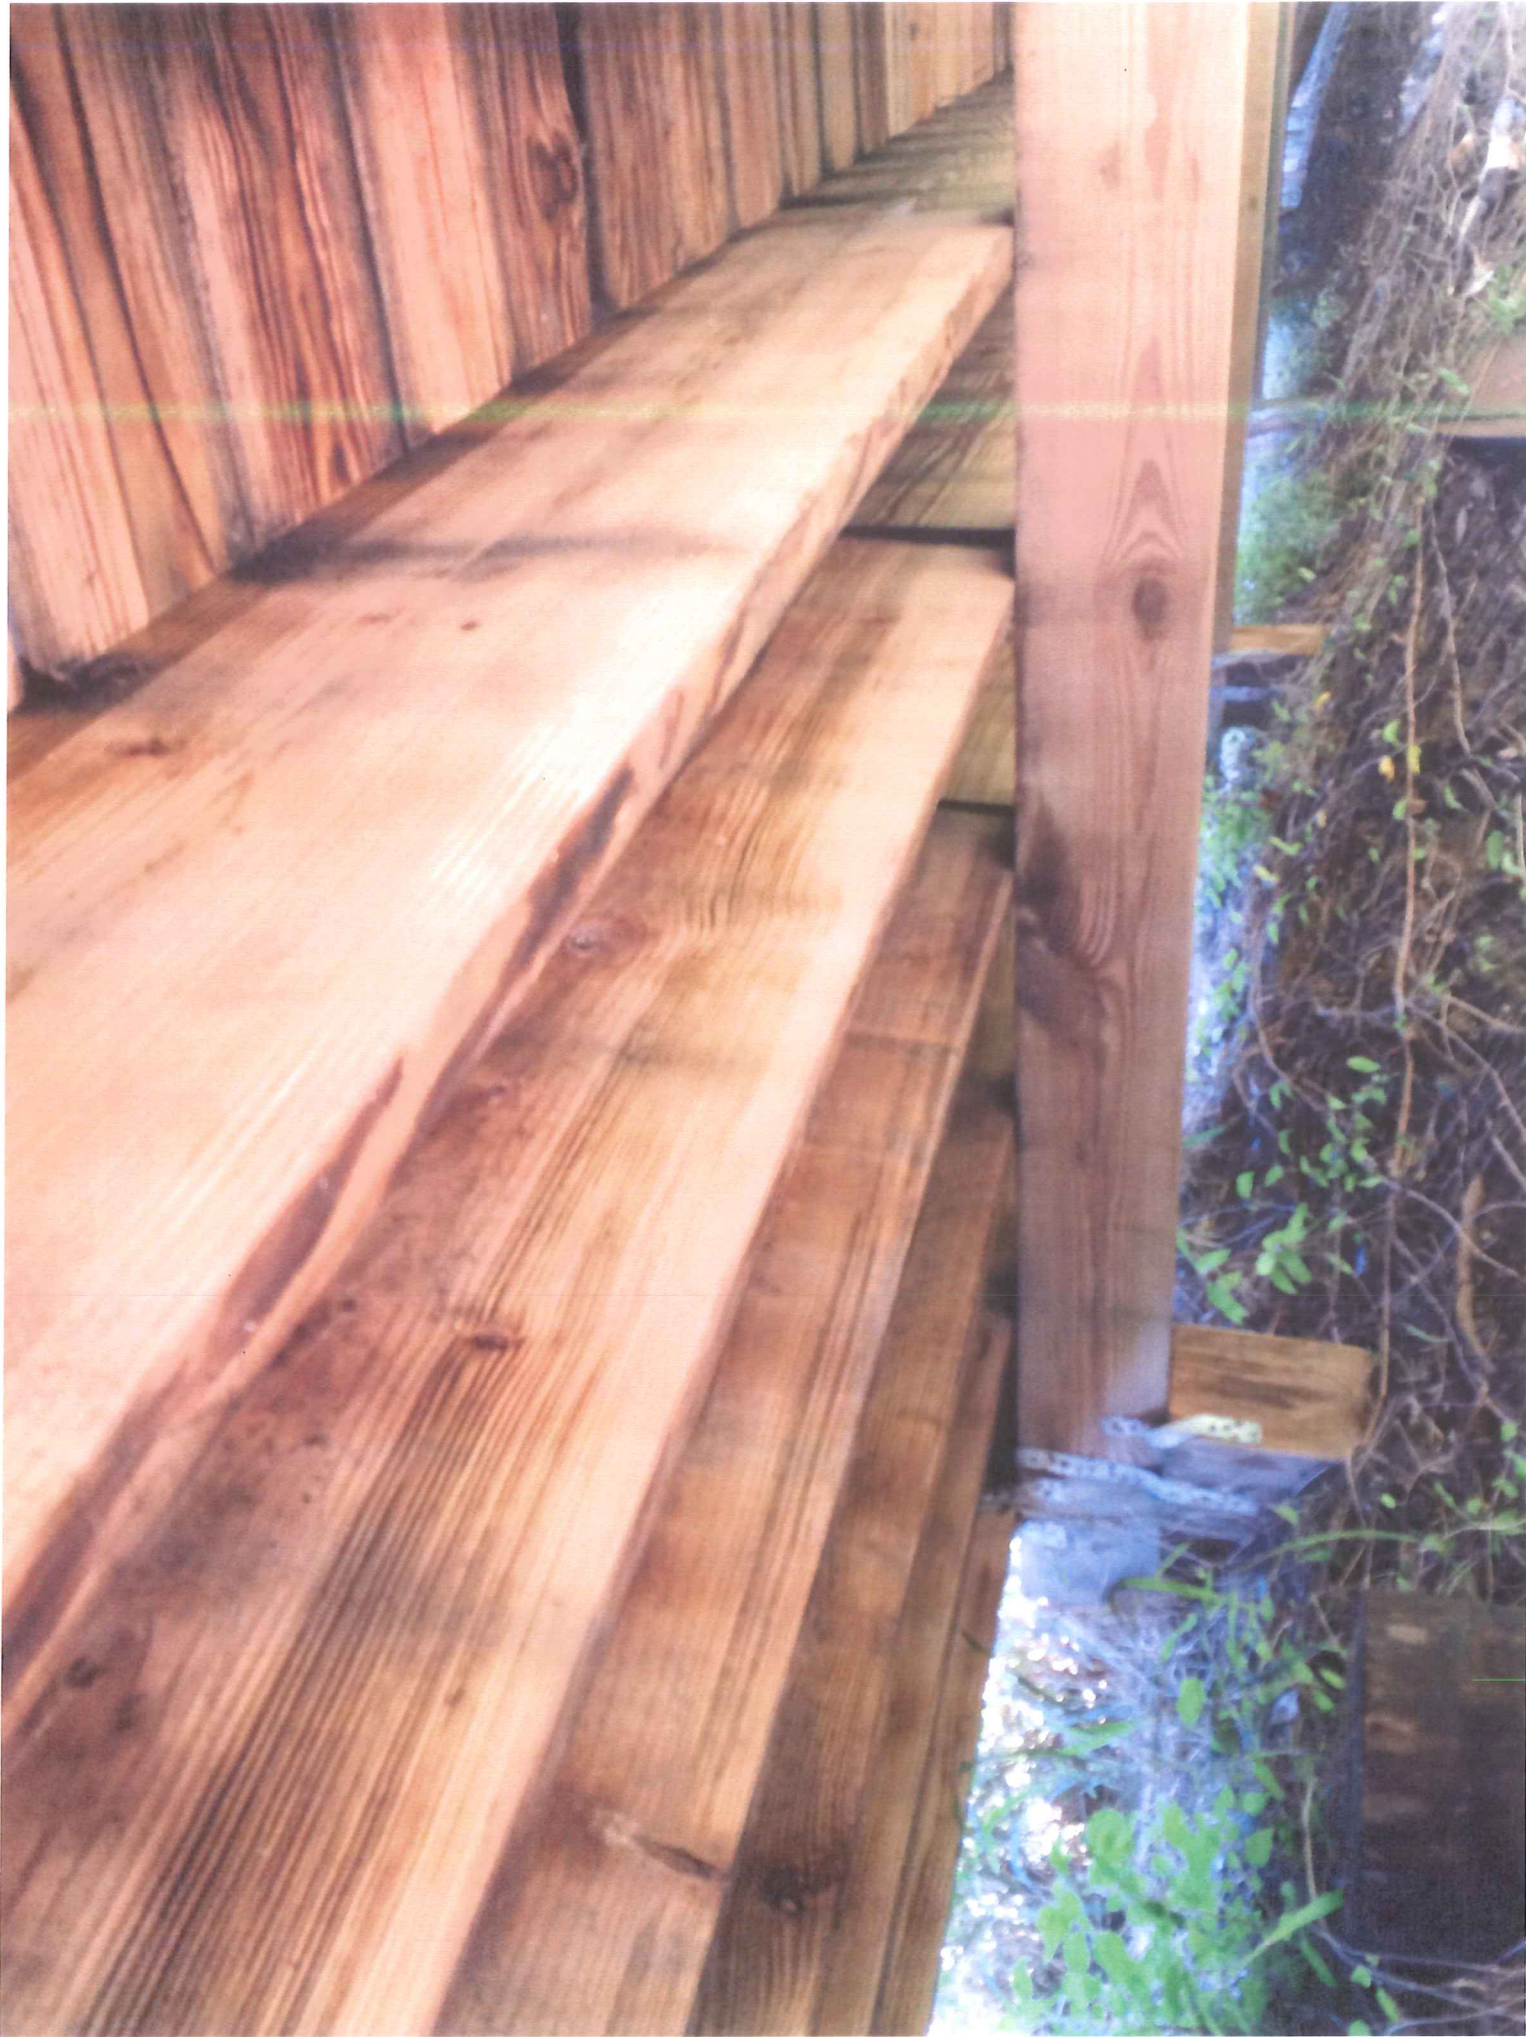

Reference Photo