

**Title: Lime rock Parking Area**

**SCOPE OF SERVICES:**

**Pine Forest Park - 32520 SR 44, Deland Fl**

The contractor shall furnish all labor, equipment, materials, fuel and any other incidental costs, and supervision necessary for the survey, layout, clearing, grubbing, grading, rolling and compaction of 8" in depth of Lime rock that is of uniform quality, no less than 98% compaction based on AASHTO T-180 for parking area.

It shall be the responsibility of the successful vendor to deliver and install the Lime rock within the time agreed. If delivery is not made within the time agreed the County shall reserve the right to refuse delivery. No compensation shall be made to the vendor for the Lime rock, equipment or labor expenses for refused deliveries.

All Lime rock supplied shall comply with the FDOT Standard Specifications for Road and Bridge Construction 2010 addition Section 911 "Lime rock Material for Base and Lime rock Stabilized Base"

The County shall refuse any delivery of wet rock and shall have the option to obtain Lime rock from the next lowest bidder

The vendor shall furnish an equipment list. If, in the opinion of the County's Project Manager, the vendor has insufficient equipment to satisfactorily complete the work the vendor shall provide additional equipment as directed by the County's Project Manager. .

**Misc. Items to be noted:**

The existing fence and curb to remain other than that at the new parking lot entrances.

Clear & Grub 40 FT minimum outside the parking lot footprint.

Silt fencing to be installed as per attached drawings.

Signage is not part of this bid.

Concrete curbs and wheel stops are not part of this bid.

Pavement markings are not part of this bid.

Sodding is not part of this bid.

Drawings shall be printed full size (24x36) for proper estimating.

Finished Lime rock work shall be flush with existing asphalt road.

- 1.01 FIELD CONDITIONS: Verify and coordinate all work to field locations and dimensions. Only Sheets L1.00, L1.01 and L3.01 are required for this bid.**

## 2.01 WORKMANSHIP:

- A. All furnishings described herein shall be installed by qualified tradesman. All installation work and materials to be per manufacturer's specifications, or as directed by the Owner's Representative.
- B. All work and materials are subject to the approval of the County.

## 3.01 ACCEPTANCE


- A. The County will review each installation to determine compliance with plans and specifications prior to final acceptance of the work.
- B. Any work not installed in accordance with the plans and specifications and rejected by the County shall be removed and replaced at the Contractor's expense.

## 3.02 GUARANTEES

- A. The contractor shall furnish warranties in writing certifying that the quality and workmanship of all materials and installation furnished is in accordance with these specifications and in accordance with the original manufacturers' warranties. The contractor shall warrant the installation workmanship for a period of one year from the date of final acceptance of the job, or any accepted portion of the job.

## 3.03 CLEANING

- A. Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, and equipment.

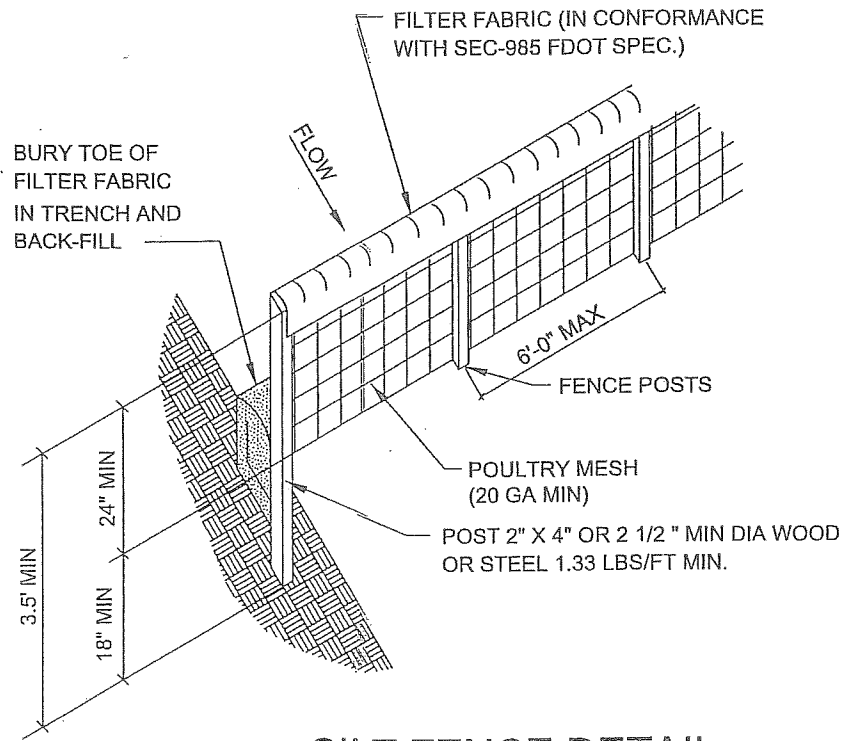

## SILT FENCE DETAIL

NTS