

New Gravel Trail Extension

SCOPE OF WORK: Provide all labor, materials, equipment, fuel and other incidental costs and supervision necessary for the site preparation, excavation, grading and compaction of a new gravel trail extension connecting to the dirt trail at the Green Mountain Scenic Overlook and Trailhead-20700 CR 455 Ferndale, Florida, 34715 . All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Locations:

It is suggested that the vendor visit the site for a better understanding of the scope of work required.

Area 1 – 520 feet long x 10 feet wide x 9 inches thick

Area 2 – 80 feet long x 10 feet wide x 10 feet high

Misc. Items to be noted:

- Field verification by Contractor is recommended
- See attached map & photos for location
- No dumping of any materials on County parking lot or paved sidewalk.
- No dump trucks or delivery vehicles through the paved trail or gravel path.
- All excess material to be properly disposed offsite by Contractor
- Contractor to install one strip of bahia sod along both sides of the new trail extension (1200 linear feet)
- Material must match the existing gravel path.
- The contractor shall be held responsible for repairing or replacing damaged property to the satisfaction of the County which is damaged by reason of the contractors operation on the property.

SUBMITTALS:

A five (5) pound sample bag of gravel must be provided for approval to Parks and Trails Division prior to the contractor delivering materials to site. Gravel must match existing gravel trail consistency.

SITE WORK:


The vendor is required to perform all services utilizing a light golf type equipment / vehicle or make arrangements with adjoining property owners. All maintenance is being performed with light golf type vehicles/equipment at this site. Vendors shall price accordingly.

ACCEPTANCE:

The County will review installation to determine compliance prior to final acceptance of the work.

CLEANING:

Perform cleaning during installation of the work and upon completion of the work. Remove from site all excess materials, soil, debris, equipment and grade the existing work area

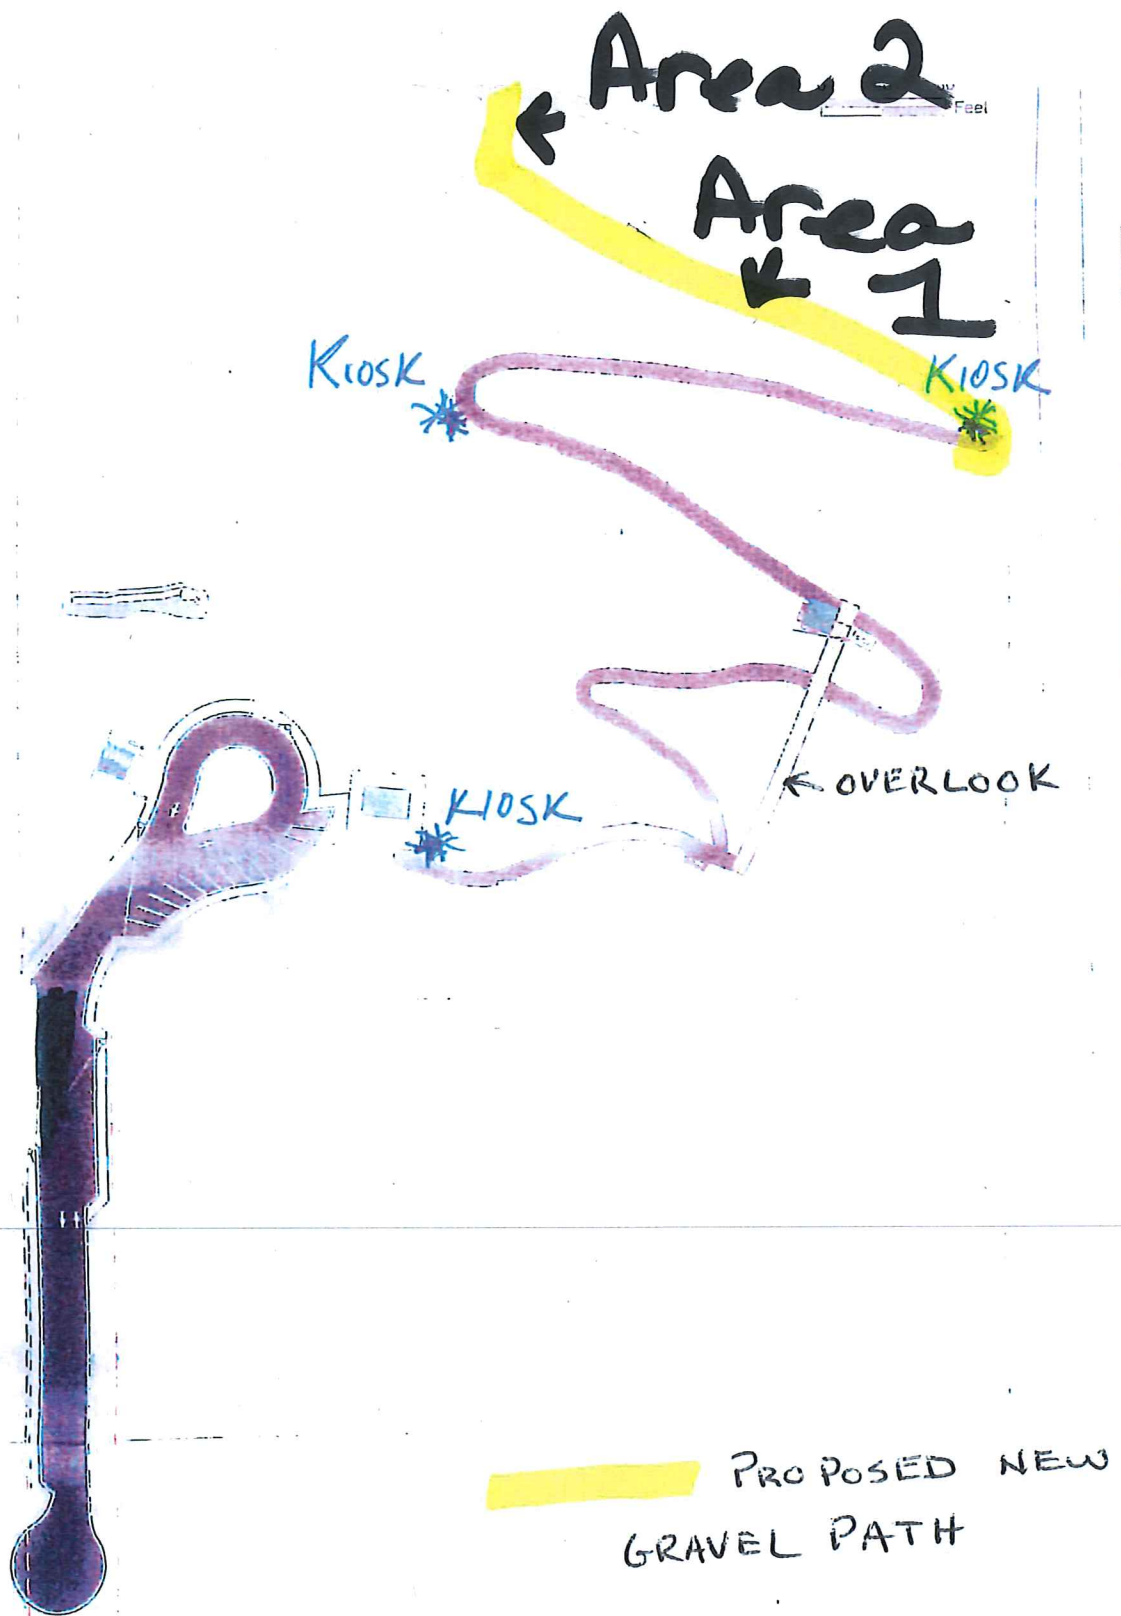

LOCATION MAP
20700 COUNTY ROAD 455, FERNDALE
FL, 34715



Sample only

04.09.2015 09:42



Existing Gravel
Path



04.09.2015 09:49





04.09.2015 09:48



04.09.2015 09:43



04.09.2015 09:47



04.09.2015 09:48

