


The contractor shall furnish all labor, equipment, materials, fuel and any other incidental costs, and supervision necessary for the installation and completion of 6gauge-scheduled 40 black vinyl coated chain link fence for backstops, side lines and dugouts at four (4) little league fields at North Lake Park. (See Attachments) All work and equipment shall be in strict compliance with the latest codes, standards and practices.

Work shall start no later than seven (7) days from the time Purchase Order is issued to the contractor. The contractor shall obtain and pay for all permits, licenses and certificates and/or any required approval of plans or specifications as may be required by local laws, ordinances, rules and regulations for the proper execution and completion of work specified. During the progress of the work, the contractor shall keep the park free from accumulations of waste materials, and any other debris resulting from the work. At the completion of the work the contractor shall remove all waste materials and the site shall be restored to good condition.

Tie-wire, #6 W & M gauge aluminum ties @ 15 o.c. for rails. Ties to be 12" apart on posts. End of ties should be wound in a telegraph trust, 2 1/2 turns. Fence - 2" diamond mesh as manufactured by Master Halco/Anchor (800)229-5615, or approved equal. NOTE: Color to be vinyl coated black wire mesh and ties to be 6 gauge.

Top, middle and bottom rails are required for the entire length of the fence.

LITTLE LEAGUE BASEBALL

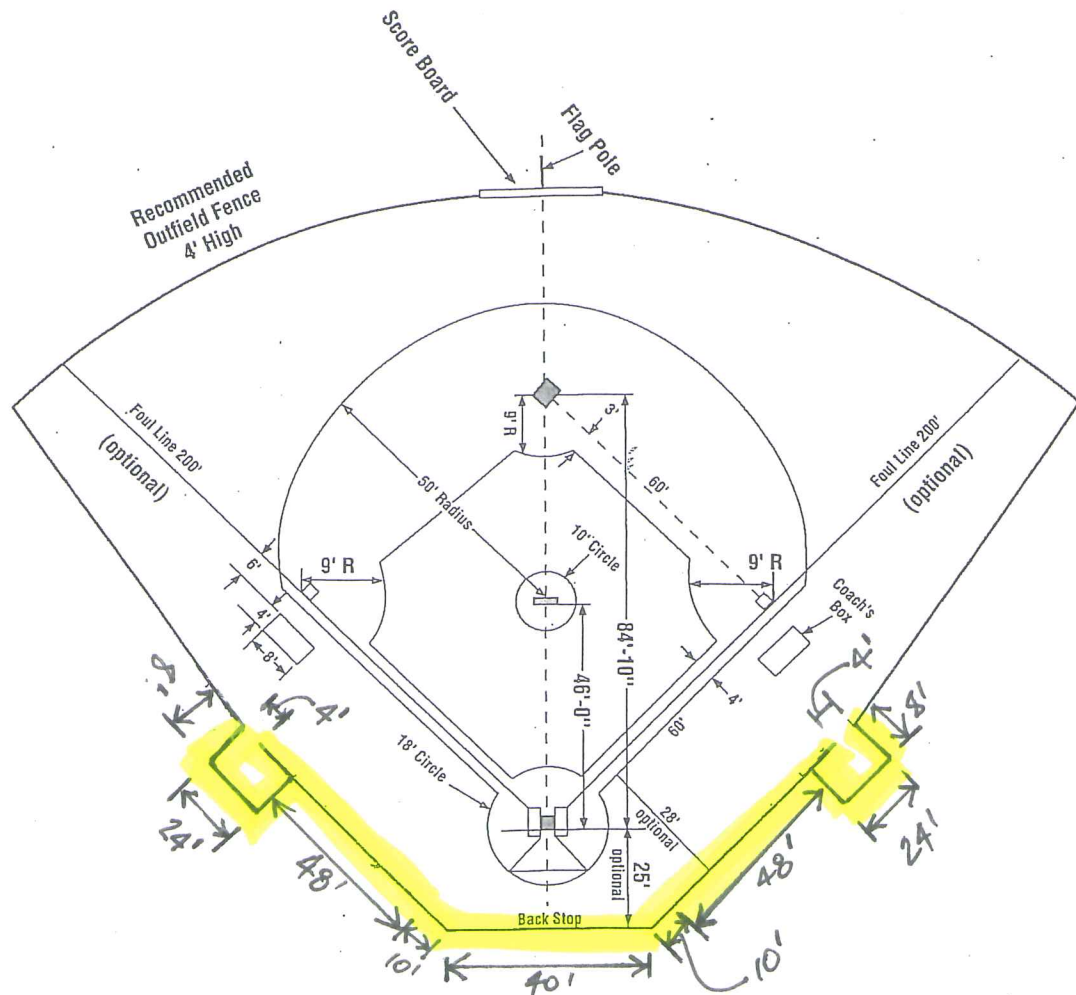

SCOPE OF WORK INCLUDES BUT IS NOT LIMITED TO.

* BACKSTOP = 60 FT @ 18 FT HIGH OF FINISH GRADE

* SIDELINES = 96 FT @ 8 FT HIGH OF FINISH GRADE

* DUGOUTS = 80 FT @ 8 FT HIGH OF FINISH GRADE


* WORK IS TO BE PERFORMED ON ALL FOUR (4) FIELDS.

NOTE: OUTFIELD FENCE AND FENCE AFTER THE DUGOUT ARE NOT PART OF THIS REQUEST FOR QUOTATION. (RFQ)


ALL WORK REQUESTED IS HIGHLIGHTED

FOUR (4) TEN FOOT PANELS

40'-0" BACKSTOP

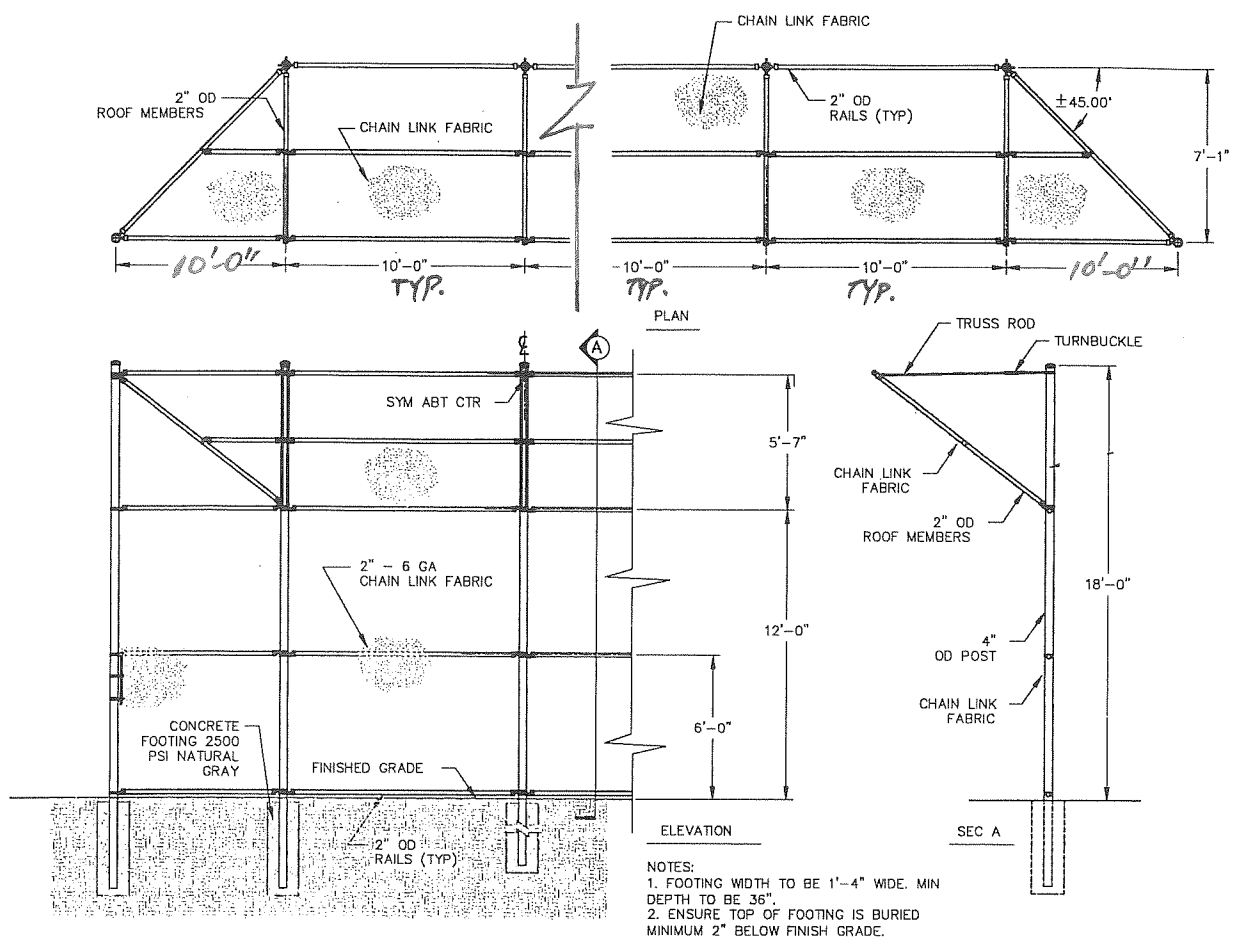

BACKSTOP (TYP.)

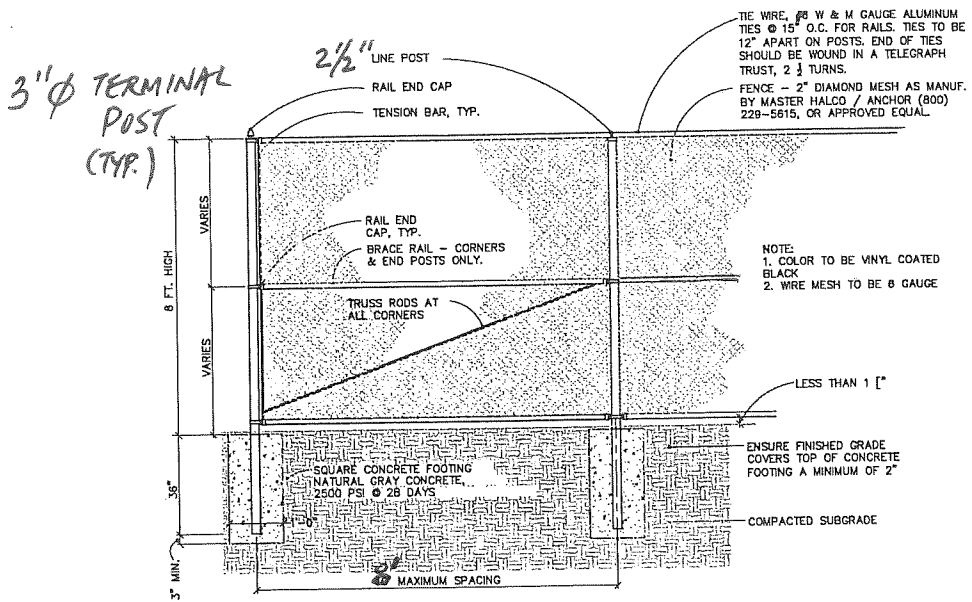

SIDE LINE AND DUGOUT (TYP.)